
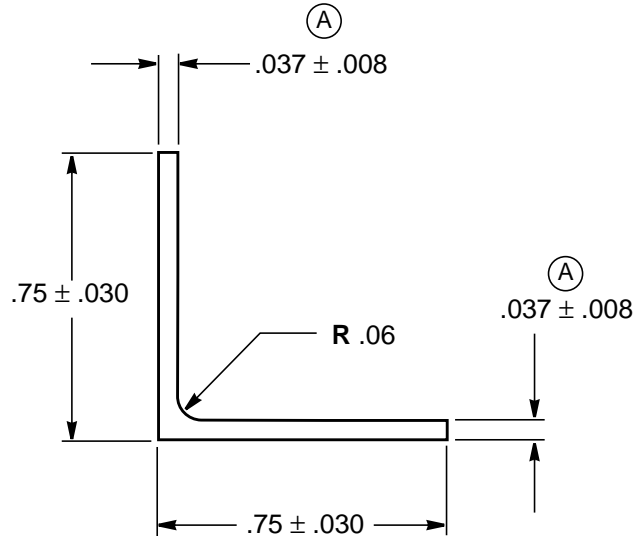


THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**

**CAGE CODE 71867  
CVR STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS



**SCALE 2:1**

**MATERIAL:** AMS 3303 SILICONE RUBBER - MIN. LENGTH 5 FEET

**COLOUR:** BLACK - FED STD 595 #37308

**FLAMMABILITY:** FAR 25.853 (b-2) AMDT 25-51 AND BURN THROUGH TEST ONLY  
PER FAR25.855 (a-1) AMDT 25-51

**ENGINEERING APPROVAL REQUIRED PRIOR TO A PRODUCTION RUN**

(A) REDRAWN AT REV 'A'  
. $037 \pm .008$  WAS . $032/.042$

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	G. BRISCOE	<b>SEAL, ANGLE</b>	<b>CVR 154</b>
CHECKED	G. MOUNSEY		
STRESSED	---		SHEET: <b>1 of 1</b>
APPROVED	S. SCHRATTNER		

REV:

REV:

REV:

REV:

REV:

REV: A - 29 NOV 99

APPROVED: 15 OCT 87