


FULL SCALE

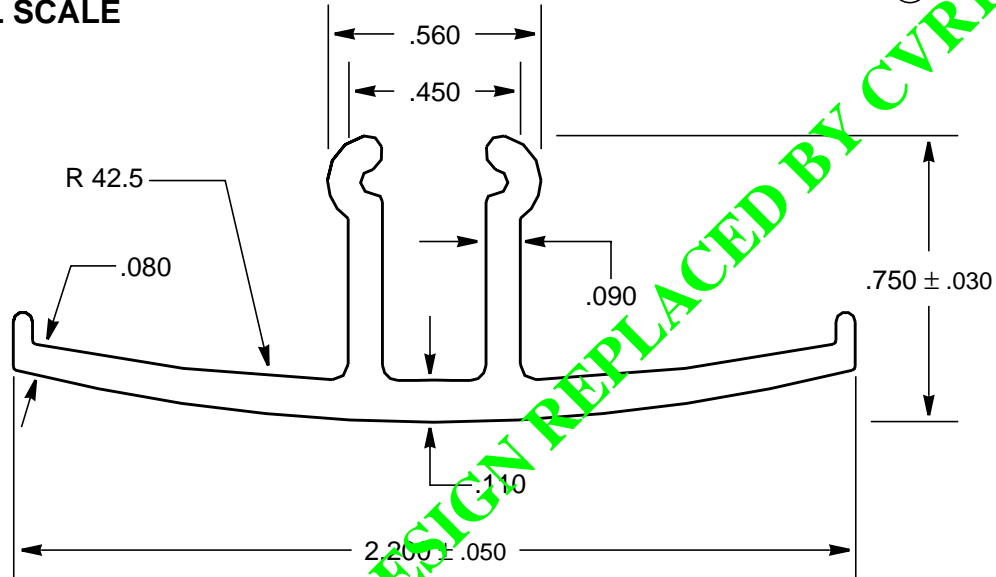

SCALE 2:1

MATERIAL: ABCO 2449 (MODIFIED POLYURETHANE)

- NOTES:**
1. FLAMMABILITY REQUIREMENTS SHALL MEET F.A.R. 25.853 (a) AMEND 25.83, APPENDIX F, PART I, PARA (a)(1)ii)
 2. MINIMUM LENGTH SHALL BE OF 144"
 3. ALL DIMENSIONS TO A TOLERANCE OF $\pm .010$, UNLESS OTHERWISE NOTED
 4. DULL FINISH REQUIRED
 5. APPEARANCE SURFACE TO BE FREE OF MAJOR BLEMISHES, STREAKS, LINES, ETC
 6. SHORE D HARDNESS OF 60-70

COLOUR:

- Ⓒ CVR 155: MATTE BLACK, FED STD 595 #37038 - REPLACED BY CVR174ME (BLACK)
- Ⓒ CVR155-1: NAVY BLUE - BAC #556 - REPLACED BY CVR174MF (NAVY BLUE)
- Ⓒ CVR 155MA: GREY - REPLACED BY CVR174MA (GREY)

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

Ⓒ COLOUR CODE TABLE DELETED
CVR174 REPLACEMENTS ADDED
STD INACTIVE FOR NEW DESIGN

DRAWN	SEE REV. A FOR SIGNATURES	SEAT TRACK COVER, EXTRUSION	CVR155
CHECKED			
STRESSED			SHEET: 1 of 1
APPROVED			

REV:

REV:

REV:

REV: C - 3 NOV 98

REV: B, 15 SEP 98

REV: A, 21 JAN 92

APPROVED: 08 OCT 87