




FULL SCALE

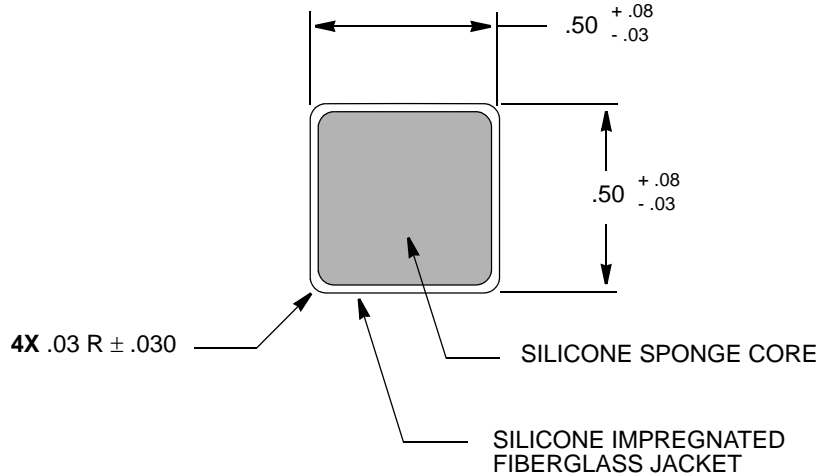

SCALE 2:1

NOTES:

- 1) Operating temperature range: -65°F to +500°F.
- 2) (A) CVR172 material, in an as-installed configuration, shall meet the requirements of FAA Advisory Circular AC 20-135 for fireproof material. (2000°F for 15 minutes with no burn-through).
- 3) Seal to compress 10% minimum under load of 35 lbs.per foot of length.
- 4) Minimum length 64.0 inches.
- 5) Ref. Arrowhead Seal #750538.
- 6) Dash number denotes seal length in 1/4 inch increments, e.g. 750538-320 = 80 inches length .

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

(A)

DRAWN	B. McDONALD	SEAL	CVR 172
STRESS	----		
MAT. TECH	S. CACOUTIS		
STDS REL	S. HAMID		
		REVISION: -A	