


THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

de HAVILLAND

**CAGE CODE 71867
CVR STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

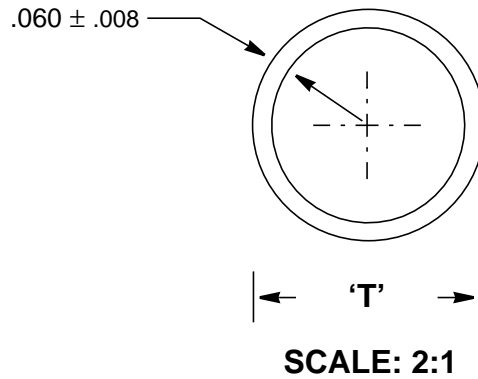

Basic Number	Dash#	'T'	Min. Length or Increment
193	-1	.580 ± .050	75"

(B)

MATERIAL: AMS 3345 or 3346 SILICONE RUBBER

NOTES: 1. FLAMMABILITY REQUIREMENTS TO MEET F.A.R. 25.853 APP. F PART1 a(iv)
HORIZONTAL 2.5 INCH/MIN. AMEND 83.

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	FOR SIGNATURES SEE ORIGINAL STANDARD DATED: 23 MAY 84	SEAL - REINFORCING FILLER	CVR 193
CHECKED			
STRESSED			SHEET: 1 OF 1
APPROVED			

(B) SEAL DIMENSION 'T' TOLERANCE WAS .020 NOW .050

REV:

REV:

REV:

REV:

REV: B 08 APR 2005

REV: A 06 APR 2005

APPROVED: