


THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF BOMBARDIER INC. OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF BOMBARDIER INC. THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AND USE, AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS.


**de HAVILLAND**

**CAGE CODE 71867  
CVR STANDARD**

ONLY THE ITEM(S) LISTED ON THIS DRAWING AND IDENTIFIED BY VENDOR'S NAME(S), ADDRESS(ES) AND PART NUMBER(S) HAVE BEEN APPROVED FOR USE IN DE HAVILLAND AIRCRAFT. A SUBSTITUTE ITEM SHALL NOT BE USED WITHOUT PRIOR APPROVAL BY DE HAVILLAND ENGINEERING STANDARDS



FULL SCALE

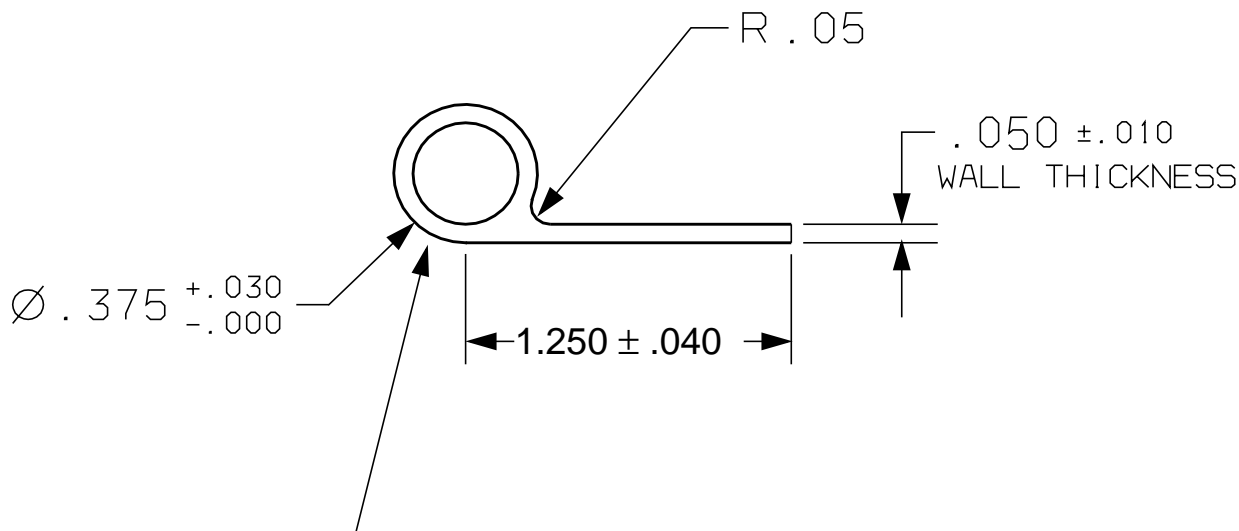

90° CORNER OPTION  
FULL SCALE

**CVR 194 -1**

**MATERIAL:** AMS 3316 SILICONE RUBBER, FIBERGLASS FABRIC REINFORCED

- NOTES:**
1. OPERATING TEMPERATURE - 60<sup>0</sup>C TO + 250<sup>0</sup>C..
  2. FABRIC SHALL NOT SUPPORT FUNGAL GROWTH.
  3. FABRIC SHALL NOT CONTAIN ASBESTOS.
  4. MOULDING SURFACE SHALL BE FREE OF SPLITS, LAPS, BLISTERS, UNWETTED FABRIC, MOLD SIGNS OR FLASHING.
  5. FABRIC SHALL BE LAID UPON A BIAS WITH NO STRIKE THROUGH. THE FABRIC SHALL BE VULCANIZED TO THE SILICONE RUBBER.
  - 6 FABRIC SHALL BE RESISTANT TO INTERMITTENT SPLASH EXPOSURE TO:  
FUEL PER ASTM D165, MIL-T-5624, MIL-T-83133, TURBO OIL PER MIL-L-7808,  
AND PHOSPHATE ESTER HYDRAULIC FLUID.
  7. SURFACE HARDNESS: APPROX 78 SHORE A SCALE.

FOR ORIGINAL SIGNATURES, SEE THE ENGINEERING STANDARDS APPROVAL RECORD

DRAWN	B. EDWARDS	<b>SEAL - SILICONE RUBBER FIBERGLASS FABRIC REINFORCED</b>	<b>CVR 194</b>
CHECKED	J. MACCOLL		
STRESS	E. GIOVANNETTI		SHEET: 1 OF 1
APPROVED	B. EDWARDS		

REV:

REV:

REV:

REV:

REV:

APPROVED: 3 DECEMBER 2007