


DE HAVILLAND AIRCRAFT of CANADA

STANDARDS SHEET

PAGE

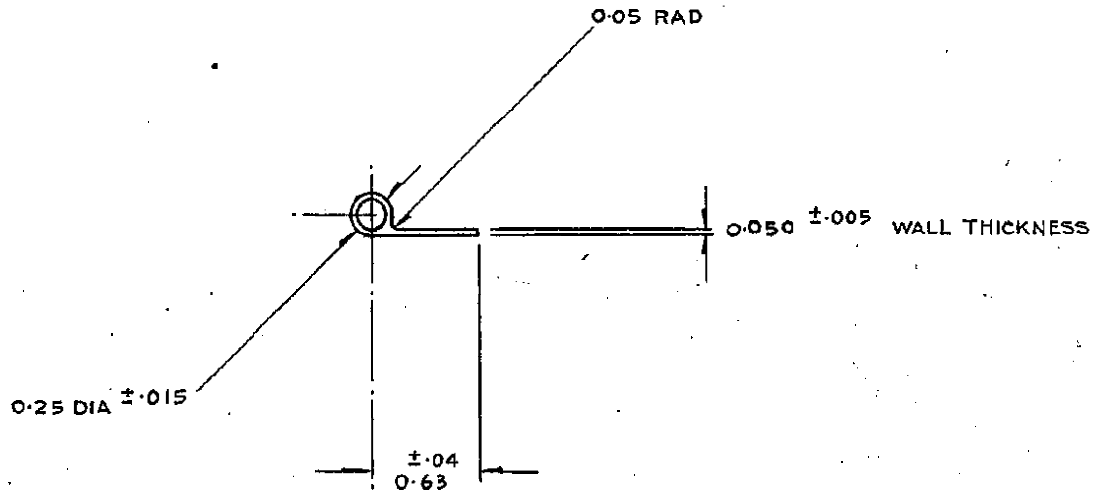

DASH No	MATERIAL	COLOUR	SPECIFICATION
	SILICONE RUBBER	GREY	AMS 3345 or 3346
-1	FLUORO SILICONE RUBBER	RED	MIL-R-25988 Ty.2 Cl.1 GR. 60 (RED)
-2	FLUORO SILICONE RUBBER	RED	MIL-R-25988 Ty.2 Cl.1 Grade 60 (RED)
-3	SEE NOTES	RED	MIL-R-25988 Ty.2 Cl.1 GR. 60 (RED)

NOTES- CVR-25-1 TO BE USED ONLY IN AREAS WHERE SEAL WILL BE SUBJECTED TO SYNTHETIC ENGINE OILS AND HYDRAULIC FLUIDS.

* NOTES

- 2 IS IDENTICAL TO -1 EXCEPT -2 TO HAVE .007 SQUARE WOVEN TERYLENE BONDED COVER. LAY UP COVER ON BIAS (MIN 2FT LENGTHS)
- 3 IS IDENTICAL TO -1 EXCEPT FOR NOMENCLATURE OUTER JACKET BONDED TO SEAL. LAY UP JACKET ON A BIAS NO STITCHES THROUGH PERMITTED.

WEIGHT:

DRAWN	SFGUNG MAY 64
CHECKED	
STRESSED	
APPROVED	

CLASSIFICATION

STANDARD

"P" SECTION
EXTRUDED RUBBER

CVR-25

SHEET 1 OF 2
FMC 71867

J.G. MULDER

(E) ARMET INDUSTRIES COMPANY
NO INDUSTRY COLUMNS
DELETED. MIL SPEC INFO.
(CLASS, TYPE, GRADE, COLOUR)
ADDED TO -1 & -2. WEIGHT FIG. ADDED
14 FEB 80
-3 CANCELLED 18 NOV 83
-4 ADDED, SHT 2 ADDED. 18 MAR 85

(D) -2 ADDED
2805 4376. 87

(C) AMS-3345 &
AR-334 ADDED
25 JUL 68 SFG

REDACTED
-ADDED S.S. 51
MAY 64

(B)

DE HAVILLAND AIRCRAFT of CANADA

PAGE

STANDARDS SHEET

DASH NOS.	MATERIAL	COLOUR	SPECIFICATION
-4	SILICONE RUBBER	BLACK	SEE NOTE

NOTE:- -4 MATERIAL:- AMS 3345
 COLOUR:- FED STAND 595 #37038
 FLAMMABILITY: ^(A) FAR 25.855(A-1) AMEND 25-51
 MIN LENGTH:- 130" OR INCREMENTS THEREOF.
^(A) FAR 25.853(b-2) And. 25-51 and
 45° BURN THROUGH TEST ONLY OF
 FAR 25.855(a-1) And. 25-51

(A) FLAMMABILITY REQUIREMENT CHANGED
 29-9-86 D.C. 49 RR F

DRAWN	R.J. SHAW	CLASSIFICATION	STANDARD
CHECKED	K. R. [Signature]	"P" SECTION EXTRUDED RUBBER	CVR-25
STRESSED			
APPROVED	SEITZAUER		
28.3.85		SHEET 2 OF 2	