


STANDARDS SHEET

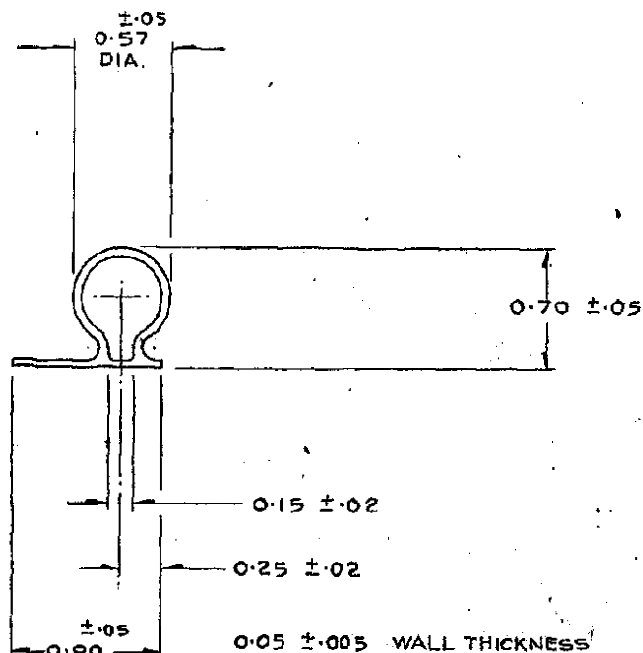

DASH NO.	MATERIAL	COLOR	SPECIFICATION
	SILICONE RUBBER	GRAY	AMS 3345 or AMS 3346
-1	FLUOROSILICONE RUBBER	RED	MIL-R-25988 Ty.2 Cl.1 Gr. 60 (RED)

NOTE - CVR-26-1 TO BE USED ONLY IN AREAS WHERE SEAL WILL BE SUBJECTED TO SYNTHETIC ENGINE OILS AND HYDRAULIC FLUIDS.

WEIGHT:

DRAWN	SFGUNG-MAY 64	CLASSIFICATION	STANDARD
CHECKED		EXTRUDED RUBBER	CVR-26
STRESSED			
APPROVED			

FMC 71867

GORD. MATHESON

REDRAFTED
ADDED S.S.
18 MAY 64

①

AMS-3345

AMS-3345
AR-334 ADDED
25 JUL 68 SFG

32

761

50

— ୧୩୫ —

30

204

3672

200

11

36-93

1.



•

1