


FULL SCALE

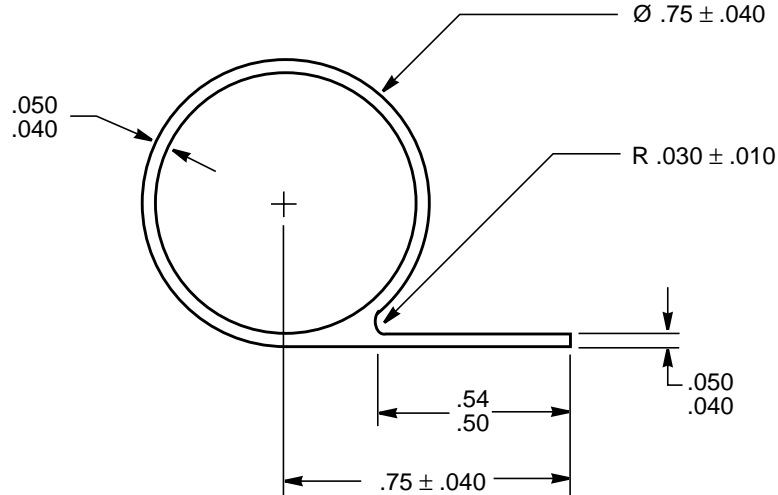

SCALE 2:1

MATERIAL:

PART NO.	MATERIAL	COLOUR	MATERIAL SPECIFICATION	(K) FLAMMABILITY REQUIRMENTS
CVR 35	Silicone Rubber	Gray	AMS 3345/3346	FAR 25.853(a) App. F, Part I(a)(1)(iv)
CVR 35-1	Fluorosilicone Rubber	Red	MIL-R-25988 Ty. 2, Cl. 1, Gr. 60	N/A
CVR 35-2	See note 2	Gray	AMS 3345/3346	FAR 25.853(a) App. F, Part I(a)(1)(iv)
CVR 35-3	Silicone Rubber	Black to Fed. Std. 595-37038	(K) AMS 3345/3346	FAR 25.853(a) App. F, Part I(a)(1)(iv)

- NOTES:**
1. CVR 35-1 is to be used only in areas where seal will be subjected to synthetic engine oils and hydraulic fluids.
 2. CVR 35-2 is identical to CVR 35 except for dacron/terylene 0.007" square weave outer jacket layed up on the bias and bonded to seal perimeter. No strike through is allowed.

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

EXTRUDED RUBBER

CVR 35

SHEET: 1 OF 1

(K) REDRAWN
AMS 3346 ADDED TO CVR 35-3
FAR FLAMMABILITY REQUIREMENTS REVISED

REV:

REV:

REV:

REV:

REV: K - 28 JUN 00

REV: J - 6 MAY 88

APPROVED: MAY 64