

AR 328-C-300
DELETED
MIL SPEC INF
(CLASS TYPE
GRADE, COLOR
ADDED TO -5.

③
① FLAMMABILITY REQUIREMENT
ADDED AS NOTE 1. 30 NOV 78 YR

② -5 ADDED
NITH TABLE
LAWSON 6 JUNE 78 YR


④ AMS-3345 E
AR 334 ADDED
26 JUL 68 SFG
A A ALBERTA
23-R-66
77 WA 20170
E A 22671 - C A 5 E 77

WEIGHT FIG AND
14 FEB 60
⑤ -7 ADDED YR. 27 MAR 85 (G) FAR RULE
NOTE: 2 ADDED
FLAMMABILITY REQUIREMENTS CHANGED
16-9-86 D.C. YR AR

DE HAVILLAND AIRCRAFT of CANADA

STANDARDS SHEET

PAGE

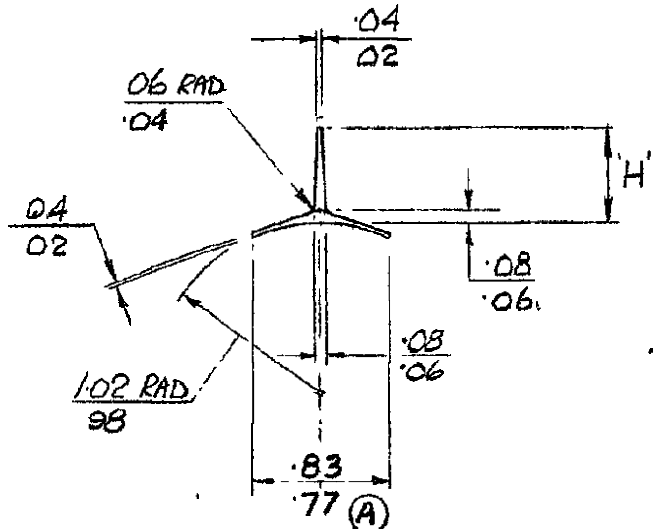

DASH	MATERIAL	COLOUR	SPECIFICATION	'H' DIM	SUPPLIER
-1	SILICONE RUBBER	GREY	AMS-3345 OR AMS 3346	.75/.70	
-3	SILICONE RUBBER	GREY	AMS-3345 OR AMS-3346	.57/.53	
-5	FLUORO SILICONE RUBBER	RED	MIL-R-25988 Type 2 Class 1 Gr. 60 (RED)	.57/.53	
-7	SILICONE RUBBER	BLACK	AMS 3345 OR AMS 3346 AND NOTE 2.	.57/.53	

NOTE 1. -3 TO MEET FLAMMABILITY REQUIREMENT ~~DHMS 69.01~~
~~CLASS 'B' METHOD 2.~~ (G) FAR 25.853(b-2) AND 25-5

NOTE 2. -7 BLACK FEL STD 595 37088 TO MEET REQUIREMENTS
OF FAR 25.855(a-1) AMEND 25-51.
(G) FAR 25.853(b-2) AND 25-51 ON A 45° BURN THROUGH TEST ONLY
OF FAR 25.855(a-1) AND 25-51

WEIGHT:

DRAWN	GEY	CLASSIFICATION	STANDARD
CHECKED			
STRESSED			
APPROVED	SCHLEGEL		

EXTRUDED TEE

CVR41

25 11 64

FMC 71867