


STANDARDS SHEET

DOUBLE SIZE

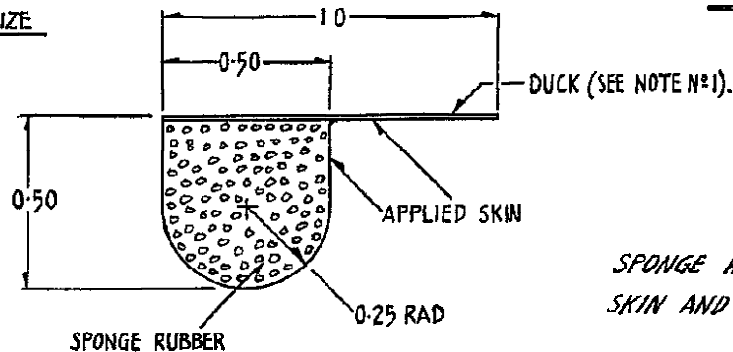

ACTUAL SIZE

SPONGE RUBBER WITH MECHANICAL
SKIN AND FLANGE

NOTE - 1 USE 8 OZ ENAMELING DUCK IMPREGNATED
WITH CRUDE RUBBER.

2 SPONGE RUBBER TO COMPOUND N° D.3310
OF THE RUBBER PRODUCTS CO., DERBY, CONN.
OR EQUIVALENT

3. PURCHASE LENGTHS SHALL CONTAIN NO
SPICES

MATERIAL - CHLOROPRENE TYPE SPONGE

SPECIFICATION - AMS-3198 E

MEDIUM HARDNESS.

* NOTE: NOT TO BE USED FOR
EXTREME COLD WEATHER OPERATN
SEE CVR-27

IDENTICAL TO SP 3620 (GRUMMAN DIE)

* (A) NOTE ADDED

SECTION ELEMENTS	$\bar{X}$	$\bar{Y}$	I_{xx}	I_{yy}	P_{xx}	P_{yy}
	INCH		INCHES ⁴		INCH	
SECTION AREA						
DRAWN	5/6 Mar 56	CLASSIFICATION			STANDARD	
CHECKED		EXTRUDED RUBBER.			CVR-6.	
STRESSED						
APPROVED						

FMC 71867