



CVR69 (WITH POLYESTER INSERT)



**CVR69/1 (WITHOUT POLYESTER INSERT)
SEE CVR69 FOR DIMENSIONS**

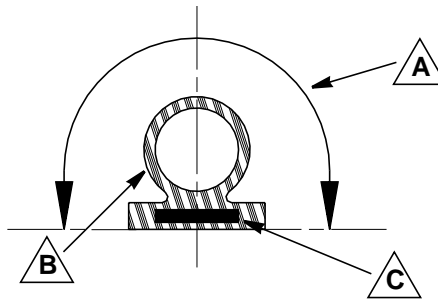

APPLICABLE TO CVR69 & CVR69/1

ALL DRAWINGS FULL SCALE

- MATERIAL:**
- A** COVER - D1000, DACRON MESH FABRIC, 100 DENIER, 34 FILAMENT
 - B** BODY - AMS3302 SILICONE
 - C** INSERT - POLYESTER IMPREGNATED FABRIC (FOR CVR69 ONLY)

- NOTES:**
1. OUTER SURFACE OF SEAL TO HAVE A SMOOTH UNIFORM FINISH.
 2. ALL TOLERANCES PER AMS 2279.

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN
CHECKED
STRESSED
APPROVED

FOR
SIGNATURES
SEE LAST REV.
DATED:
03 SEP 81

**SEAL - CENTRE BULB
SILICONE**

CVR 69

SHEET: 1 of 1