THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

de HAVILLAND

CAGE CODE 71867 CVR STANDARD THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

œ, REV:

SEP (

REV: F, 18


21 MAR

REV:

REV: C, 15 NOV 78

REV: B, 27 MAR 76

FULL SCALE

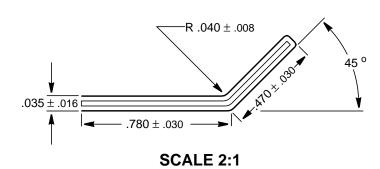

MATERIAL: BODY - AMS 3302, SILICONE RUBBER, .025 THK

FABRIC - DACRON .007" SQUARE WEAVE FABRIC

COLOUR: GREY, FED STD 595 #36492

NOTES: 1) FLAMMABILITY REQUIREMENTS TO FAR 25.853 (b-2) AMEND 25-51

G) 2) WEIGHT: 0.0207 lbs/ft

3) FABRIC VULCANIZED TO TOP AND BOTTOM SURFACES AND AROUND ONE EDGE AS SHOWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN R. KROMKAMP **CHECKED** D. LINTS **STRESSED** APPROVED **SCHRATTNER**

SEALING STRIP

CVR 72

SHEET:

1

්ෆ