


THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

de HAVILLAND

**CAGE CODE 71867
CVR STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

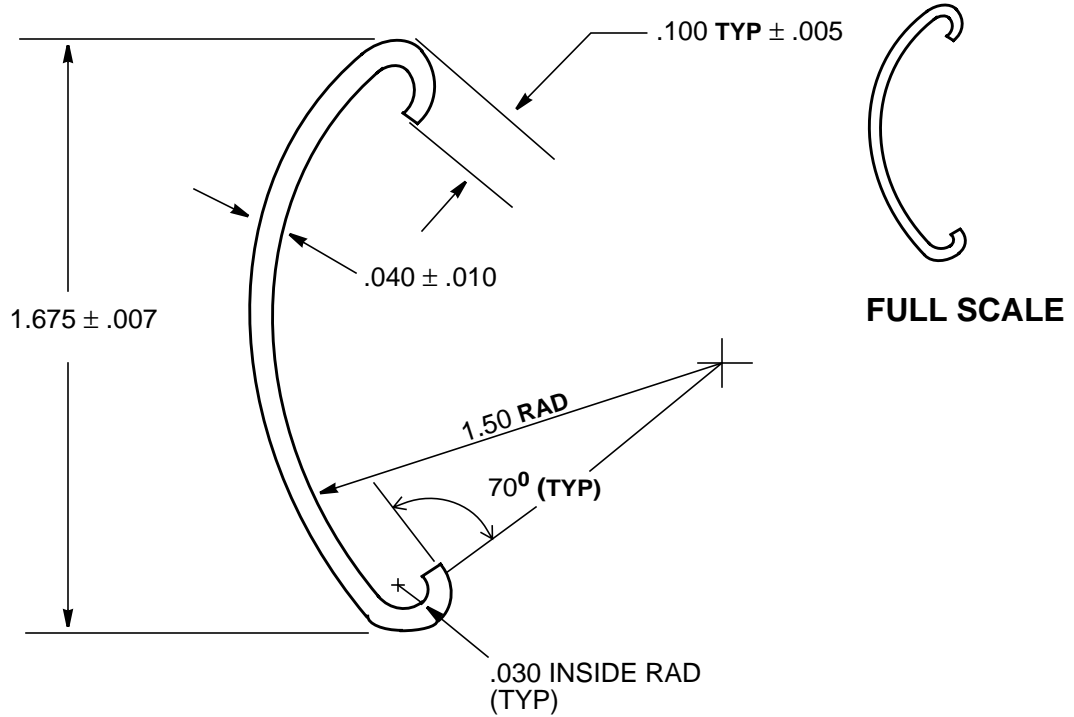

MATERIAL: POLYPHENYLENE OXIDE (NORYL GRADE LS6010) (E)

COLOUR: GREY

FLAMMABILITY: FAR 25.853 (b) AMDT 25-23

MIN LENGTH: 12 FEET

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	WRIGHT
CHECKED	JBS
STRESSED	TM FIELDING
APPROVED	J.B. SWANN

EXTRUDED SHAPE

CVR 88

SHEET: 1 of 1

(E) REDRAWN AT REV 'E'
NORYL LS6010 WAS NORYL GRADE 265

APPROVED: 09 OCT 77 REV: A - -09 oct 77 REV:B - 12 NOV 77 REV:C - 29 SEP 82 REV:d - 29 SEP 86 REV: E - 23 AUG 07 REV: