




STANDARDS SHEET

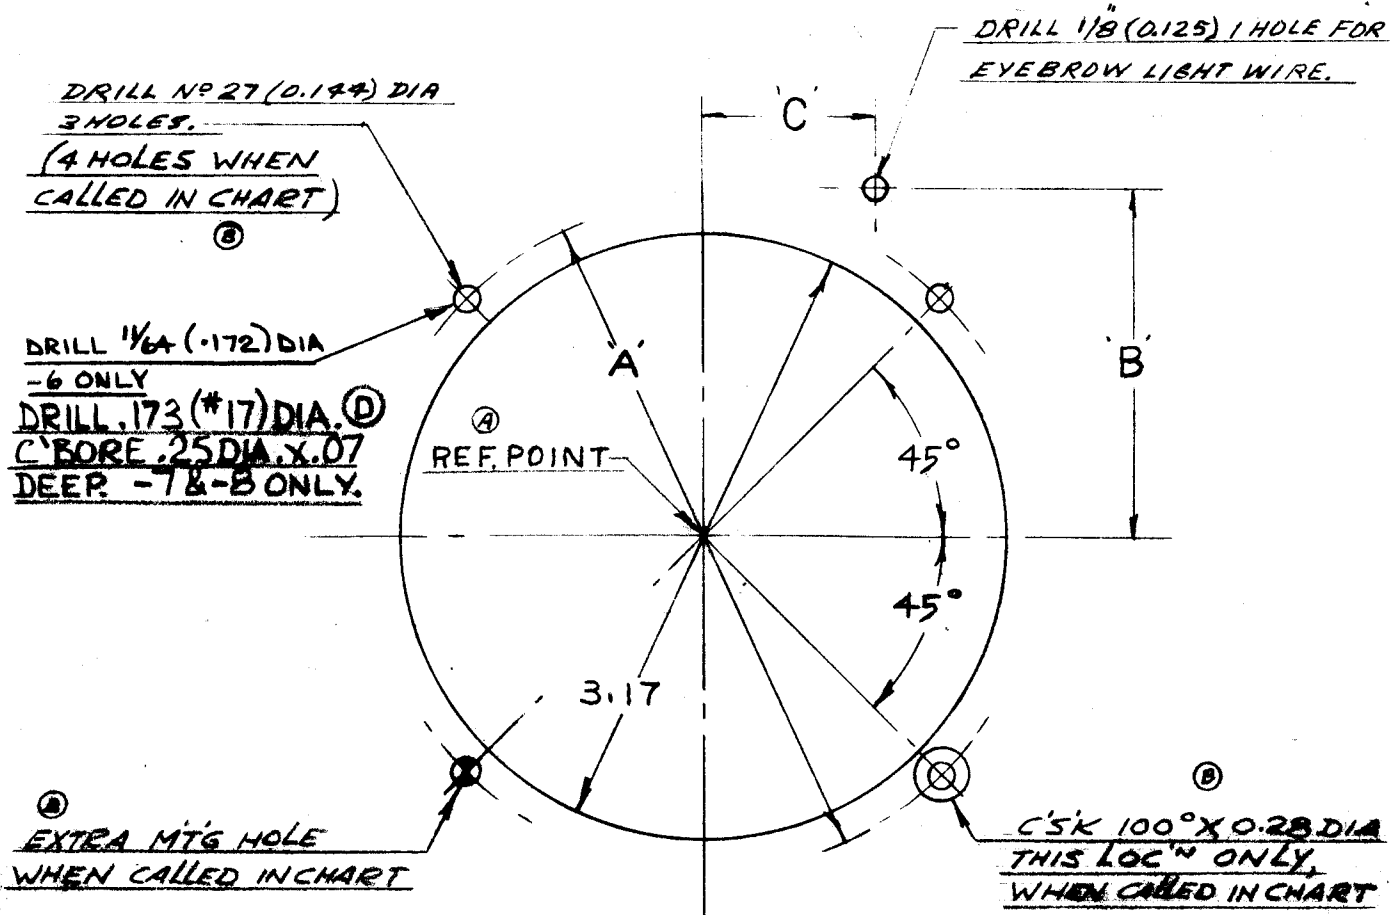

PART NO	C'SK HOLE	MT'G HOLES	DIM. 'A'	DIM 'B'	DIM 'C'	LIGHT WIRE HOLE
-1	NOT REQ ^o	3 REQ ^o	3.50	—	—	NOT REQ ^o
-2	NOT REQ ^o	3 REQ ^o	4.25	—	—	NOT REQ ^o
-3	NOT REQ ^o	3 REQ ^o	3.50	1.82	0.90	REQ ^o
③ -4	NOT REQ ^o	4 REQ ^o	3.50	1.82	0.90	REQ ^o
-5	NOT REQ ^o	4 REQ ^o	3.50	—	—	NOT REQ ^o
-6	NOT REQ ^o	3 REQ ^o	3.50	—	—	NOT REQ ^o
① -7	NOT REQ ^o	4 REQ ^o	3.50	1.82	0.90	REQ ^o
① -8	NOT REQ ^o	3 REQ ^o	3.50	—	—	NOT REQ ^o

DRAWN J. CARLSON

CLASSIFICATION

STANDARD

CHECKED R. W. [Signature]

PANEL CUTOUT -

DS 21

STRESSED [Signature]

 $2\frac{3}{4}$ " DIAL INSTRUMENT - PLAIN

APPROVED 23-4-59

FMG 71867

① - 7 & - 8 ADDED - MARCH 9, 1960. ③ - 4 ADDED - MARCH 20, 1960. ⑤ - 6 ADDED - SEPTEMBER 7, 1960. ⑥ - 7 & - 8 ADDED - P. 008V 24/11/73 DC-8