




STANDARDS SHEET

This STANDARD supercedes all concave cutter notes on drawing.

WIDTH W
0.125 ($\frac{1}{8}$)
0.187 ($\frac{3}{16}$)
0.25 ($\frac{1}{4}$)
0.312 ($\frac{5}{16}$)
0.375 ($\frac{3}{8}$)
0.437 ($\frac{7}{16}$)
0.50 ($\frac{1}{2}$)
0.562 ($\frac{9}{16}$)
0.625 ($\frac{5}{8}$)
0.687 ($\frac{11}{16}$)
0.75 ($\frac{3}{4}$)
0.812 ($\frac{13}{16}$)
0.875 ($\frac{7}{8}$)
0.937 ($\frac{15}{16}$)
1.0

(WIDTH OF CONCAVE)

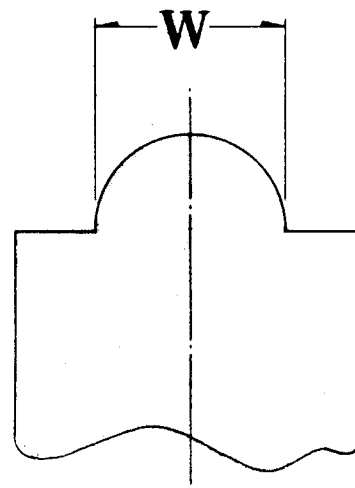

(SUPERSEDES (S-81))

DRAWN	SFGUNG	CLASSIFICATION	STANDARD
CHECKED		CUTTER CONCAVE	DS-45
STRESSED			
APPROVED			

FMC 71867