




STANDARDS SHEET

This STANDARD supercedes all slitting-saw notes on drawing.

WIDTH W	DEPTH D	RADIUS R
0.031 ($\frac{1}{32}$)	1.50	
0.062 ($\frac{1}{16}$)	1.50	
0.093 ($\frac{3}{32}$)	1.50	
0.125 ($\frac{1}{8}$)	2.0	
0.156 ($\frac{5}{32}$)	2.0	
0.187 ($\frac{3}{16}$)	2.0	
0.218 ($\frac{7}{32}$)	2.0	
0.125 ($\frac{1}{8}$)	2.0	0.031 ($\frac{1}{32}$)
0.156 ($\frac{5}{32}$)	2.0	0.031
0.187 ($\frac{3}{16}$)	2.0	0.031
0.218 ($\frac{7}{32}$)	2.0	0.031

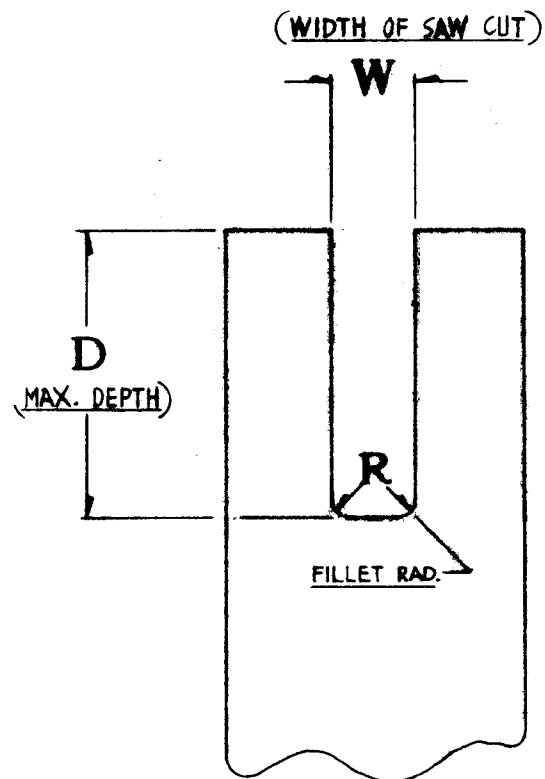

(SUPERSEDES CS. 83)

DRAWN	SPGJG	CLASSIFICATION	STANDARD
CHECKED		CUTTER	DS-47
STRESSED		SLITTING SAW	
APPROVED			

FMC 71867