





STANDARDS SHEET

DS 52-1

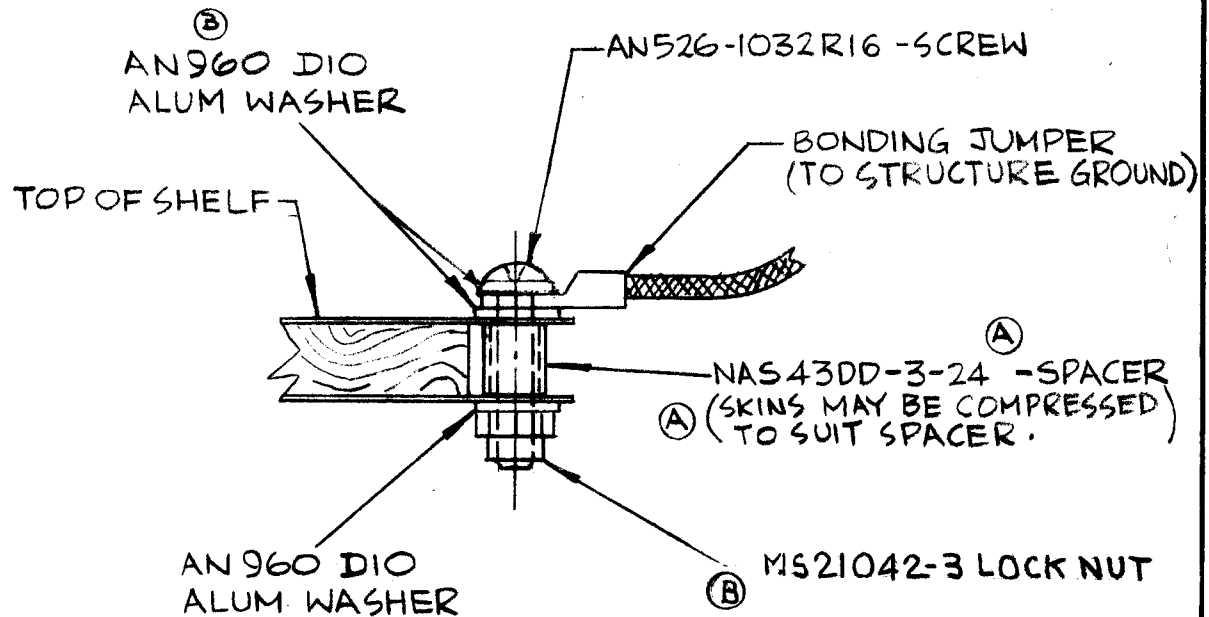

TYPICAL FOR BONDING OF SHELF ONLY

DS 52-2

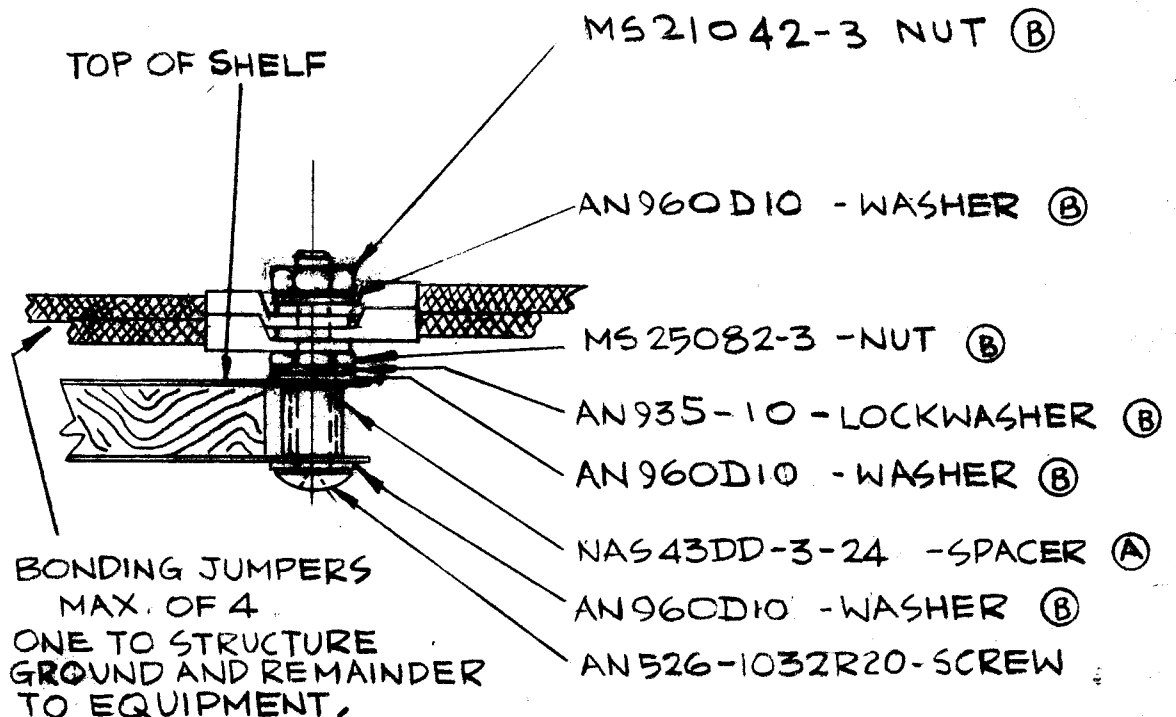

TYPICAL FOR BONDING OF SHELF AND INDIVIDUAL EQUIPMENT JUMPERS (IF NECESSARY)

DRAWN	PHIPPS	CLASSIFICATION	STANDARD
CHECKED	<i>[Signature]</i>	BONDING JUMPERS-INST OF	DS 52
STRESSED		BALSA CORE SHELF	
APPROVED	<i>[Signature]</i>		


REVISED
T.O.D.S. 42
ECSP 212
APR. 17-64
APP. S.S. 513

OC. 1/62



STANDARDS SHEET

DS52-3

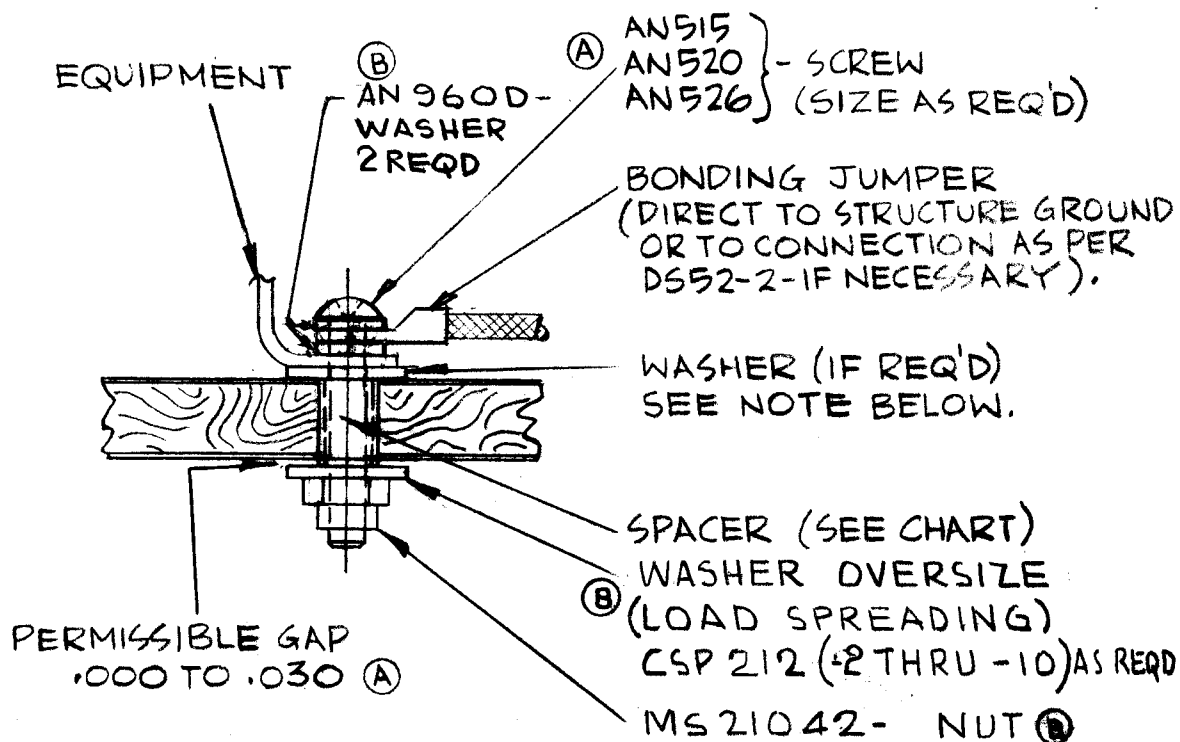

SCREW SIZE	SPACER PART No. (A)	CLEARANCE HOLE IN SHELF
#4	NAS 43DD-0-28	#8 (.199) DIA.
#6	NAS 43DD-1-28	#G (.261) DIA.
#8-#10	NAS 43DD-3-28	#P (.323) DIA.
#1/4	NAS 43DD-4-28	#W (.386) DIA.

NOTE:-

- (B) USE WASHER OVERSIZE (LOAD SPREADING) CSP 212-2 THRU -10 ON TOP, AS REQD. IF EQUIPMENT MOUNTING FOOT PROVIDES LOAD SPREADING AREA EQUAL TO OR LARGER THAN THE SPECIFIED WASHER SIZE, WASHER MAY BE OMITTED.

TYPICAL EQUIPMENT BONDING-AT ONE FIXING SCREW ONLY

(C) FOR USE ON BALSA SHELF WITH LESS THAN .025 THK. ALUM SKIN


DRAWN	PHIPPS	CLASSIFICATION	STANDARD
CHECKED	<i>Klohn</i>	BONDING JUMPERS - INST OF BALSA CORE SHELF	DS 52
STRESSED	<i>huy</i>		
APPROVED	<i>huy</i>		

155 (C)
NOTE REVISED.
31 OCT 67 L.B.

HDW REVISED
TO DS-42 (A)
ECSP 212 (B)
APRIL 17-64
APP. S.S. (C)

(A) OCT 1/62

STANDARDS SHEET

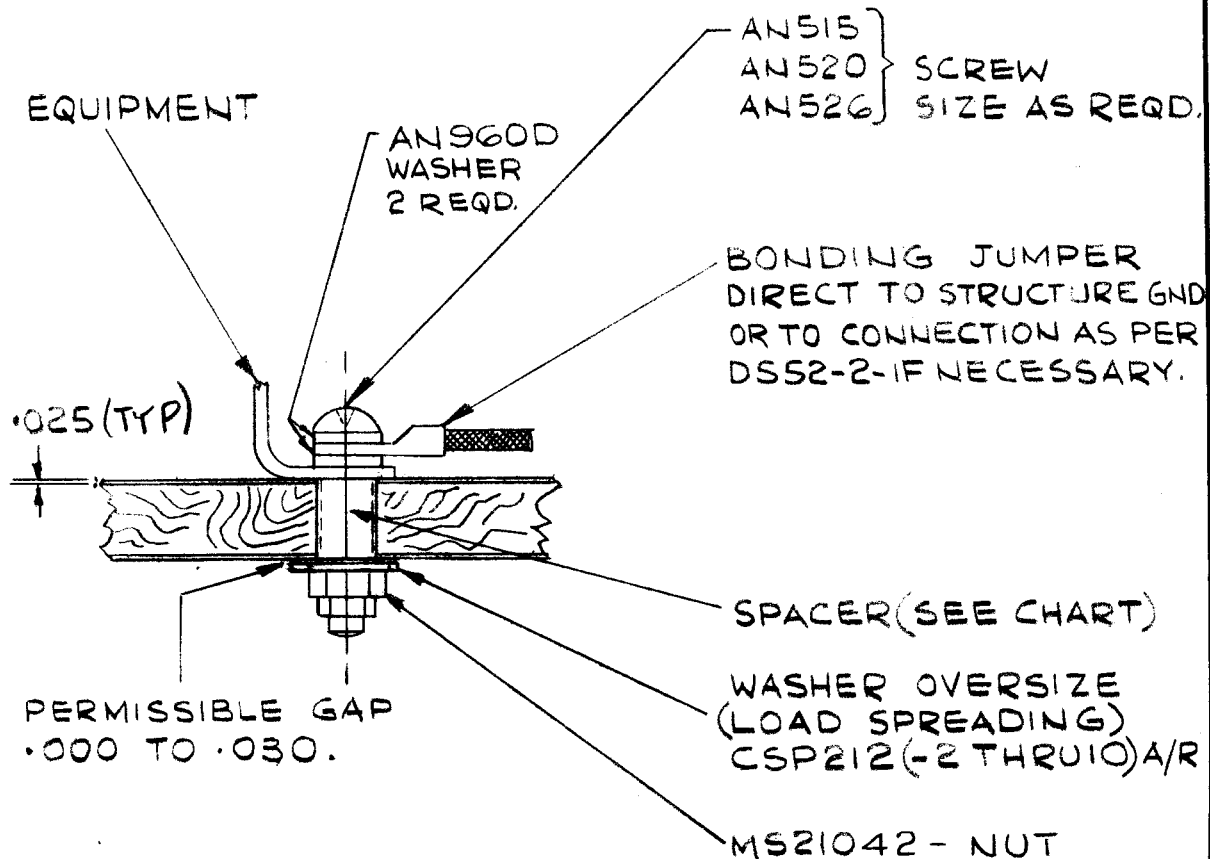

DS52-4

SCREW SIZE	SPACER PART No.	CLEARANCE HOLE IN SHELF
#4	NAS43DD-0-28	#8 (.199) DIA.
#6	NAS43DD-1-28	#6 (.261) DIA.
#8-10	NAS43DD-3-28	#P (.323) DIA.
#1/4	NAS43DD-4-28	#W (.386) DIA.

NOTE:-

TYPICAL EQUIPMENT BONDING - AT
ONE FIXING SCREW ONLY,
FOR USE ON BALSA SHELVES
WITH .025 THK. ALUM SKIN.

DRAWN	L. BARBER	CLASSIFICATION	STANDARD
CHECKED	<i>Reh.</i>	BONDING JUMPERS INSTL. OF BALSA CORE SHELF	DS 52
STRESSED			
APPROVED	<i>W.B.</i>		