


This drawing is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without the permission of THE DE HAVILLAND AIRCRAFT OF CANADA LIMITED

REPORT ALL DRAWING ERRORS TO ENGINEERING

REVISIONS

CHANGE	ITEM NO.	DESCRIPTION	DATE	DRAWN	CHECKED	STRESS	APPROVED
A		ROLLER DIA. .500 WAS .375. DIM. 1.781 WAS 1.728. OVERTRAVEL DIM. .250 MIN. ADDED.	20. 2. 76	J. 1. 6.			
B		LOCKWASHER WAS MS35338-145	12. 76	M. 3.			
C		NOTE 5 ADDED	25. 82	M. 3.			

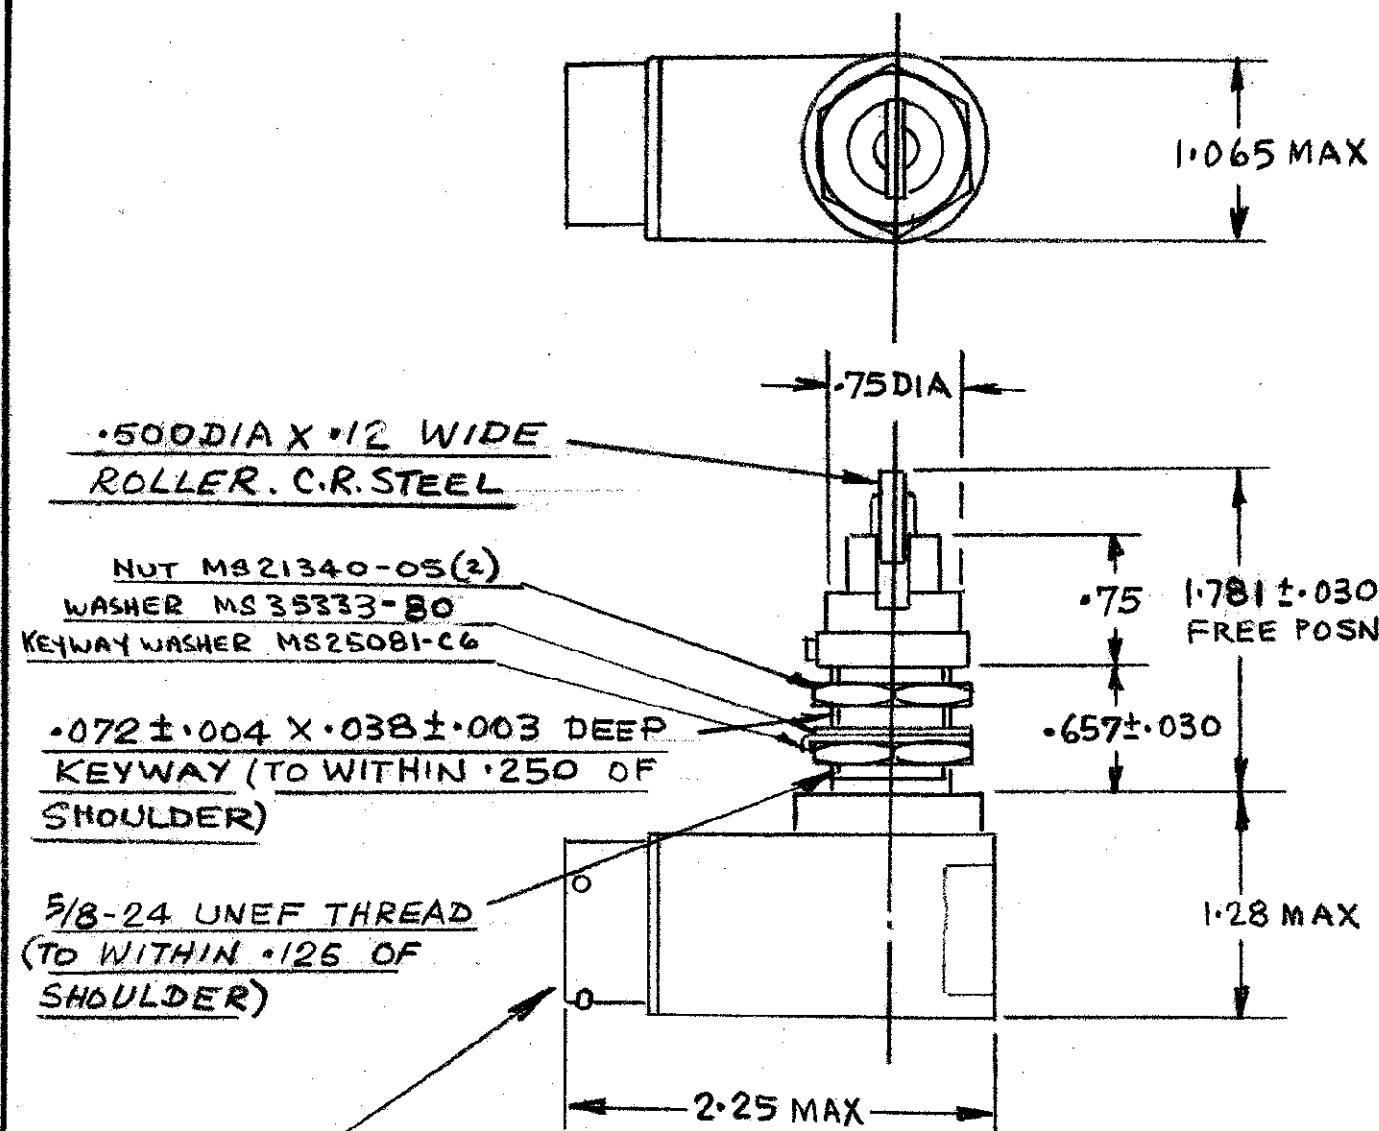


RECEPTACLE TO MATE
WITH MS3126E10-6S
(MS3113H10-6P REF)
SEE NOTE 5

CHARACTERISTICS.
OPERATING FORCE
FULL TRAVEL "
RELEASE "
PRETRAVEL
DIFF. TRAVEL
OVERTRAVEL

6-12 LB.
30 LB. MAX.
4 LB. MIN.
.040 MAX.
.020 MAX.
.250 MIN.

SOURCE CONTROL DRAWING

ONLY THE ITEM(S) LISTED ON THIS DRAWING AND IDENTIFIED BY VENDOR'S NAME(S), ADDRESS(ES) AND PART NUMBER(S) HAVE BEEN APPROVED BY THE DE HAVILLAND AIRCRAFT OF CANADA LIMITED FOR THE USE IN DHC AIRCRAFT. A SUBSTITUTE ITEM SHALL NOT BE USED WITHOUT PRIOR APPROVAL BY THE DE HAVILLAND AIRCRAFT OF CANADA LTD.

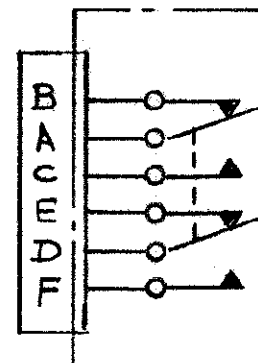

WIRING DIA.
(DE-ENERGIZED)

APPROVED VENDORS

PART N°	VENDOR	CODE IDENT.
21HE23-R	MICRO SWITCH-FREEPORT-ILLINOIS	91929

NOTES.

- ENCLOSURE FINISHED WITH GREEN EPOXY BASED ENAMEL COLOR N° 34151 PER FED. SPEC. 595.
- UNIT TO MEET IMMERSION TEST REQUIREMENTS OF MIL-E-5272 PROC. I
- CONTACT RATING: 28VDC, 5AMP. RES., 3AMP. IND., 4AMP. MOTOR LOAD; SEA LEVEL TO 100,000FT.
- HERMETIC SEALING REQUIRED PER MIL-S-8805, HERMETIC, DESIGN 5.
- RECEPTACLE MUST INCLUDE ENGAGEMENT SEAL IN ACCORDANCE WITH MIL-C-26482G

DRAWN	M. DOLAN
CHECKED	J. I. G.
STD. M&P	10.1.74
STRESS	
CH. DRAFT	
DATE	Jan 16/74

THE DE HAVILLAND AIRCRAFT OF CANADA LIMITED
DOWNSVIEW ONTARIO

DRAWING TITLE

SWITCH - LIMIT - 2PDT
NOSEGEAR STEERING

CODE IDENT NO.	DWG SIZE	DRAWING NO.	RELEASE	REV.
71867	B	DSC168		C
SCALE	WGT. CALC	ACTUAL	SHEET	