

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF BOMBARDIER INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF BOMBARDIER INC. THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AND USE, AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS.


de HAVILLAND

CAGE CODE 71867

SOURCE CONTROL DRAWING

ONLY THE ITEM(S) LISTED ON THIS DRAWING AND IDENTIFIED BY VENDOR'S NAME(S), ADDRESS(ES) AND PART NUMBER(S) HAVE BEEN APPROVED FOR USE IN DE HAVILLAND AIRCRAFT. A SUBSTITUTE ITEM SHALL NOT BE USED WITHOUT PRIOR APPROVAL BY DE HAVILLAND ENGINEERING STANDARDS

SOURCE CONTROL DRAWING

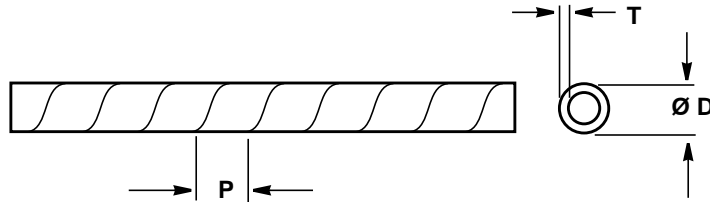

DSC No	MATERIAL	COLOUR	Ø D NOM	WIRE BUNDLE SIZE	P PITCH ± .015	T WALL THICKNESS ± .005
*DSC230-1A	*NYLON	WHITE	.125	1/16" to 1/2"	.203	.015
*DSC230-2A			.250	3/16" to 2.0"	.375	.023
*DSC230-3A			.500	3/8" to 4.0"	.500	.031
*DSC230-4B		BLACK	.125	1/16" to 1/2"	.218	.015
*DSC230-5B			.250	3/16" to 2.0"	.375	.020
DSC230-6HT	TEFLON	WHITE	.125	1/16" to 1/2"	.218	.020
DSC230-7HT			.250	3/16" to 2.0"	.375	.031
DSC230-8HT			.500	3/8" to 4.0"	.500	.031

NOTES:

1. PROCUREMENT SHALL SPECIFY THE DSC AND VENDOR PART NUMBER ON THE PURCHASE ORDER
2. SUFFIX 'A' FOR INTERIOR USE
3. SUFFIX 'B' FOR EXTERIOR USE
4. SUFFIX HT FOR HIGH TEMPERATURE USAGE (450°F MAX)
- *5. NYLON INACTIVE FOR NEW DESIGN

LIST OF CURRENT SHEETS

SHEET	1	2								
REV	C	A								

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	L. J. SHAW	TITLE: SPIRAL WRAPPING	DSC 230
CHECKED	P. TOMBLIN		
STRESS	---		PAGE 1 OF 2
APPROVED	P. TOMBLIN		

© ADDED ZEUS INDUSTRIAL PRODUCTS ON SHEET 2

REV: REV: REV: C - 08 MAY 03 REV: 20 MAY 99 REV: 26 MAY 87 APPROVED:

APPROVED: 20 MAY 99