
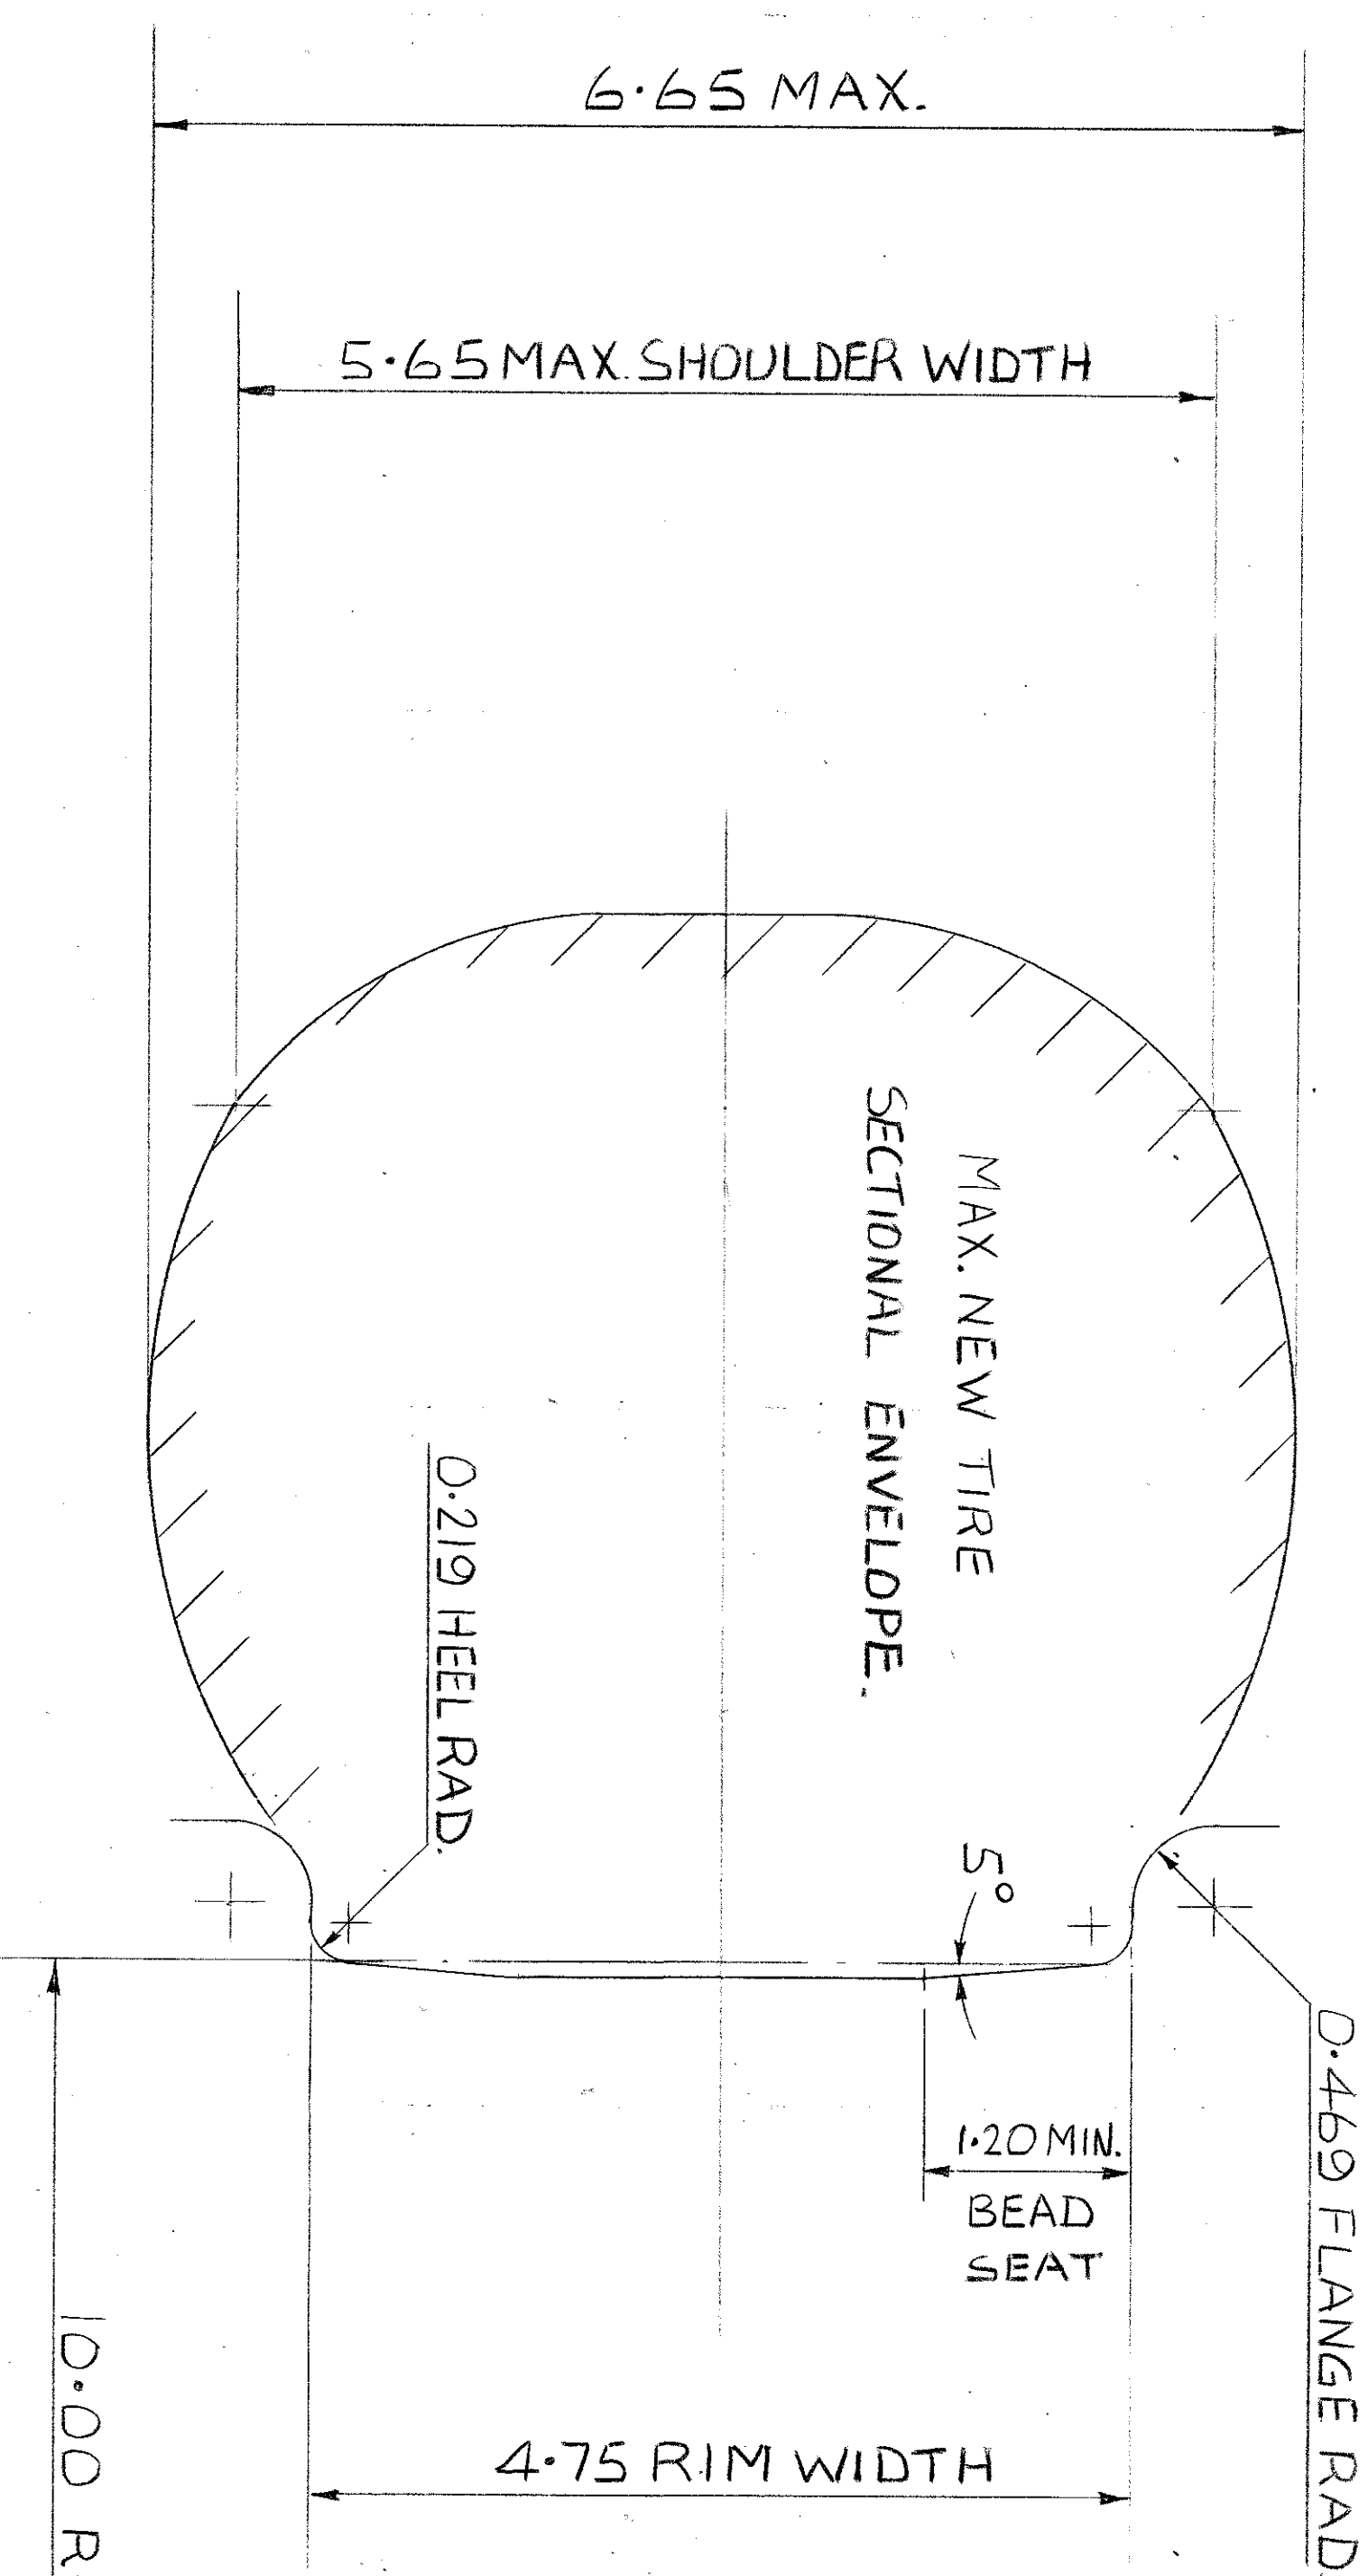


REVISIONS				1
CHANGE	ITEM NO.	DESCRIPTION	DATE	
A	1	750 C62 ISSUE CURRENT AT QUALIFICATION DATE WAS 750 C62. RATED LOAD 2450 LB MIN WMS 2450 LB.	4 OCT '84	
B	2	WORDS, SUSPECT TO WORDS LEFT OF COLUMN 7. 1500 MAX W.C. ADDED TO DUALS. NEW DESIGN ADDED TO HAVUT.	22 NOV '84	
C	3	ADDED NOTE THIS DWG. EPS B/10-14.	9/1/89	
D	4	...	9/1/89	
APPROVED				
CHECKED				
DRAWN				
DATE				

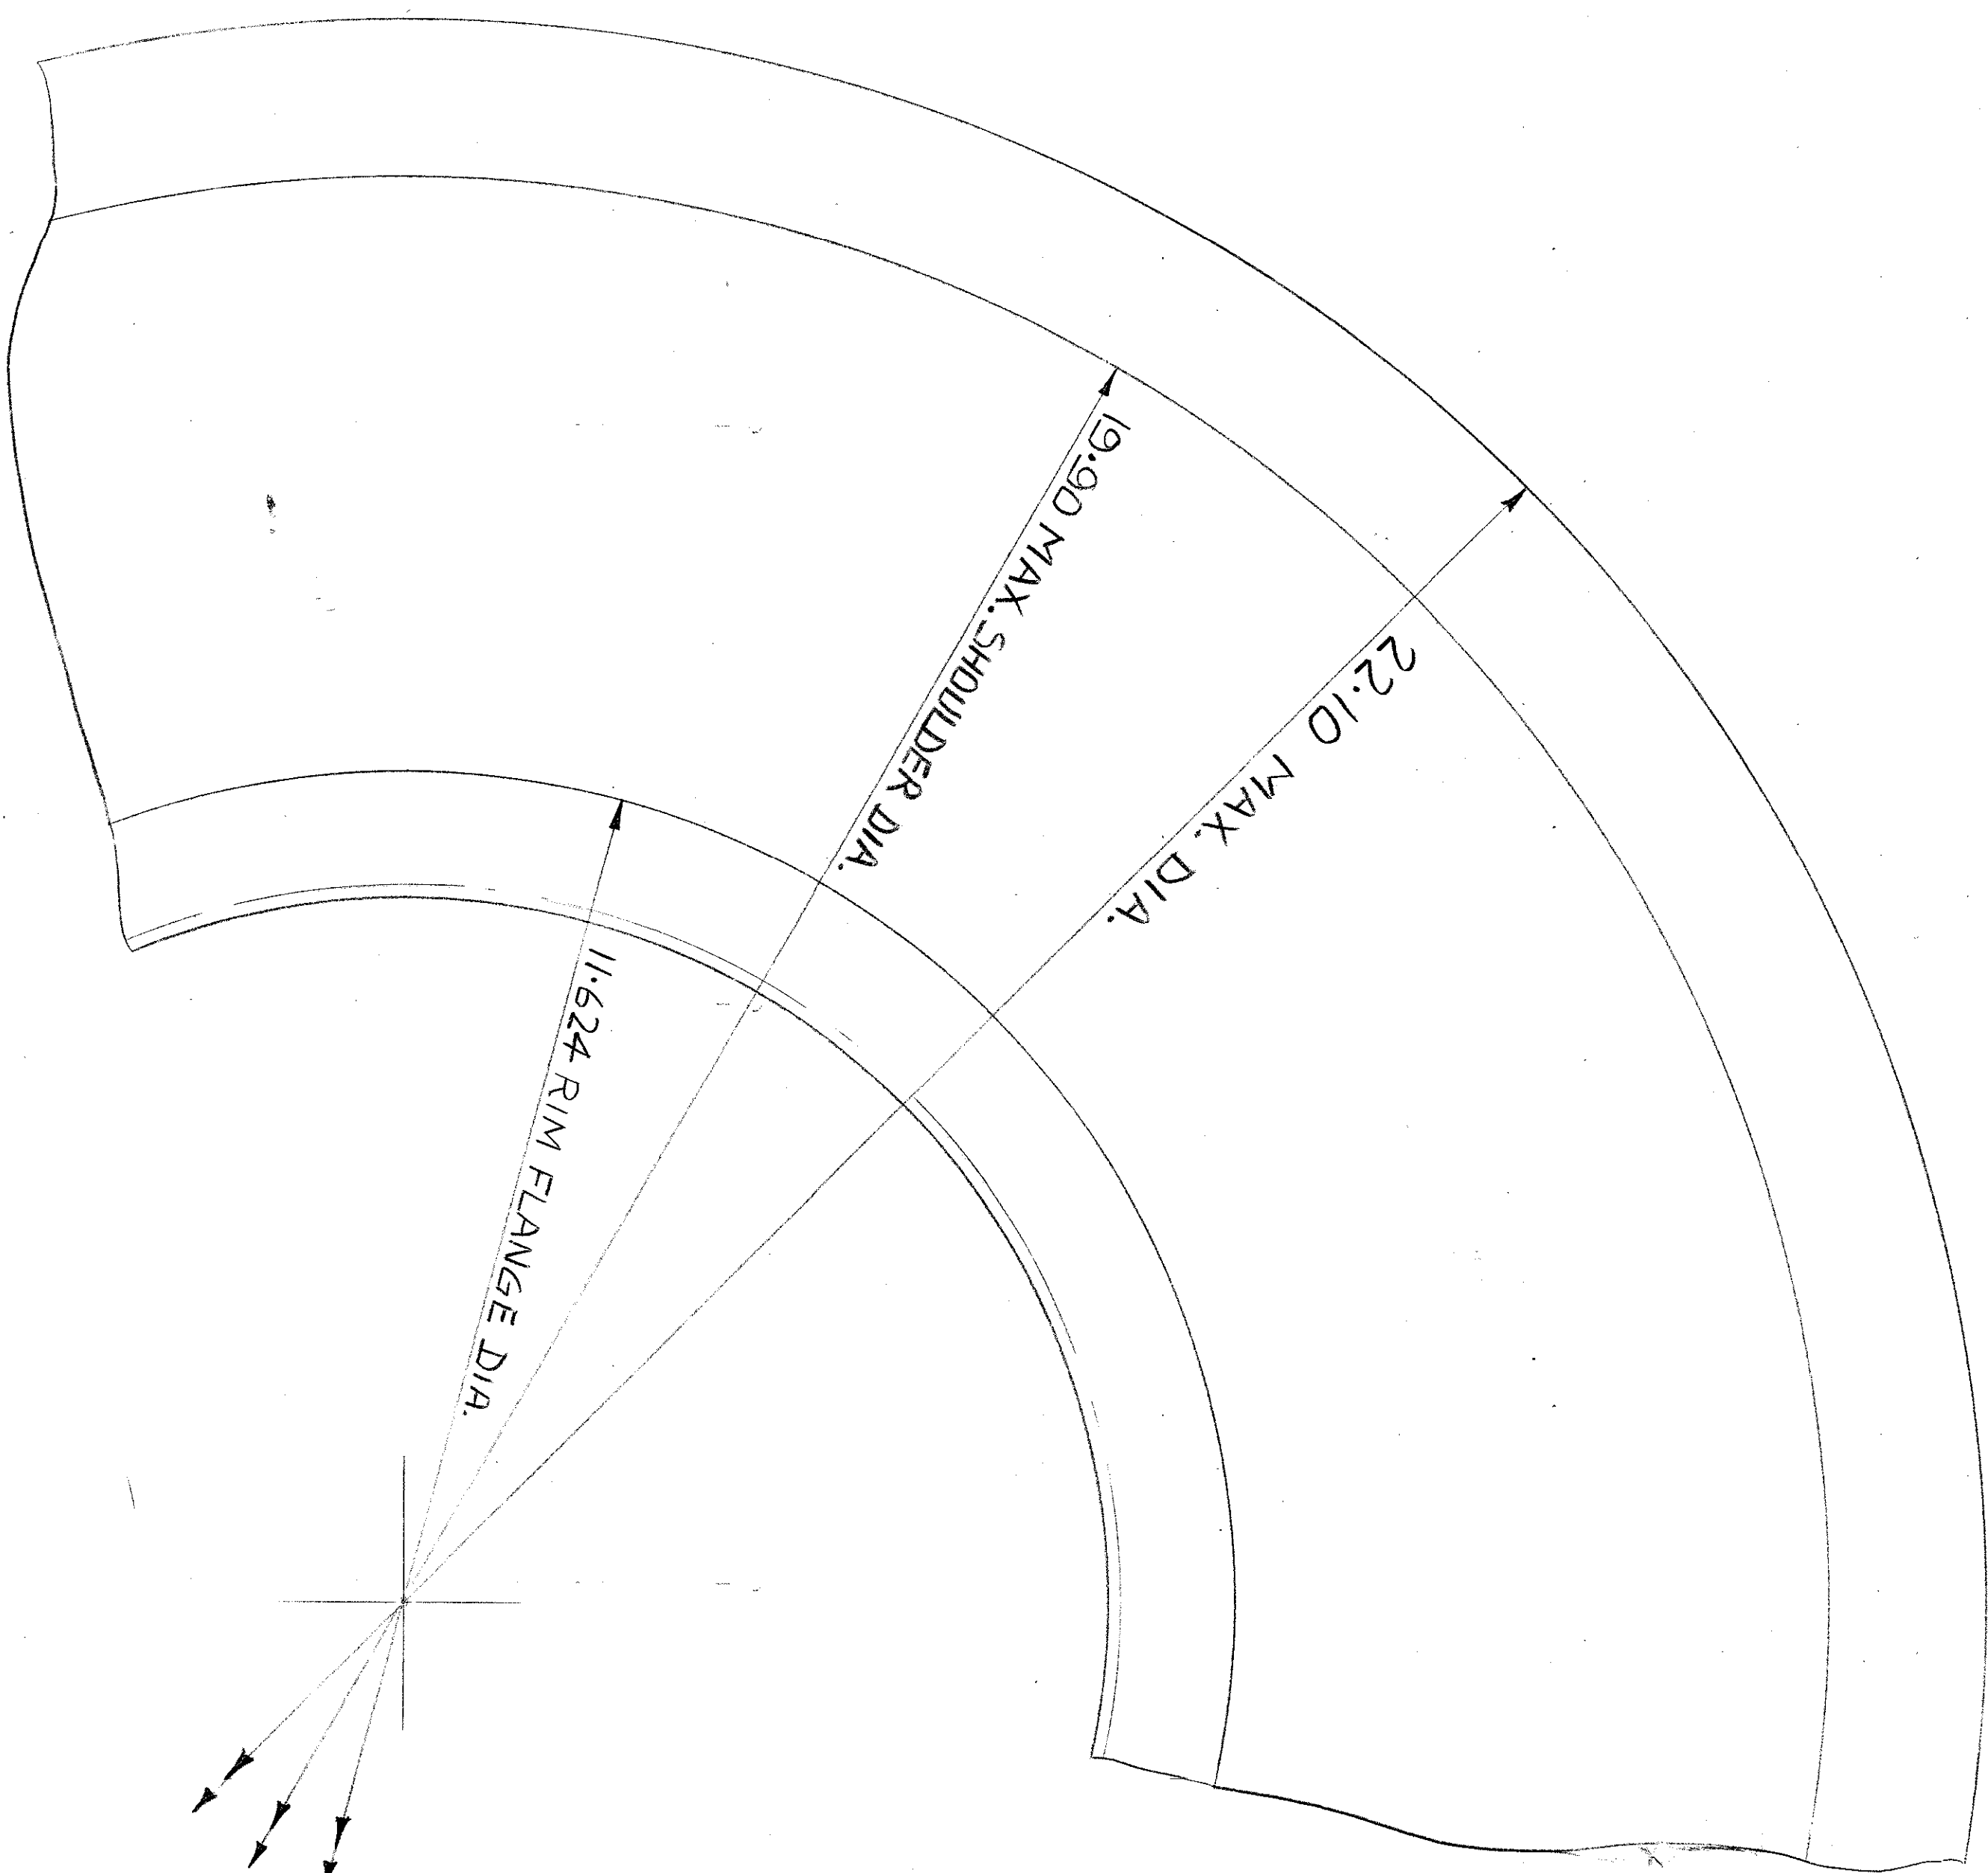

APPROVED SOURCE OF SUPPLY			
DRG. NO.	SUPPLIER	MFR. PART NO.	CODE IDENT
DSC 261	DUNLOP	DR12326T	® 150lb MAX W.T.

TABLE OF REQUIREMENTS.

RATED LOAD	2450 lb MIN.
DEFLECTION AT RATED LOAD	35%
PLY RATING	AS NEEDED
INFLATION PRESSURE	48 P.S.I.
SKID DEPTH	0.20 MIN.
TREAD PATTERN	RIBBED
AIR CONTAINMENT	TUBELESS
SPEED RATING	160 MPH.
ACCEPTABLE UNBALANCE	12 OZ. IN. MAX.
STATIC TIRE RADIUS	9.10
FLAT TIRE RADIUS	6.80 REF.
WEIGHT	14.0 lb MAX. (NEW DESIGN).
STANDARD OF APPROVAL	FAR 37.167 T50-C62
RETRADABILITY	FREE FROM ABNORMAL RESTRICTIONS

THIS DWG. SUPERSEDED BY EPS 8/10-14.

SOURCE CONTROL DRAWING

DO NOT SCALE DWG	
QUANTITY REQ. PER	ZONE
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11