


DE HAVILLAND



AIRCRAFT of CANADA


PAGE

STANDARDS SHEET

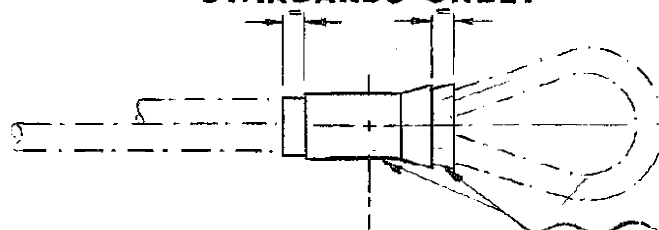


METAL SLEEVE
TO BE FLARED
TO FIT ON
ASSEMBLY

⑤ PLASTIC SLEEVE
-18 REINSTATED
-15 ASSY WAS -17-14
MIL-1-631 WAS FLARE
HT 105 C-U OR RUF 100
CLEAR WAS BLACK
18. 26 AUG 81

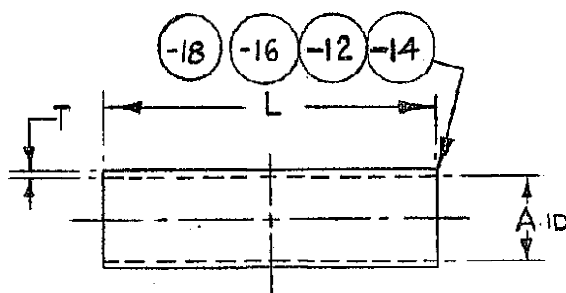

PLASTIC SLEEVE

DASH NO.	DIMENSIONS				MATERIAL SPEC	COLOR
-12	1/4	.020	1.00		MIL-1-631 TYPE F FORM 2 GRADES CLASS 2	CLEAR
-14	3/8	.025	1.00			
-16	1/2	.025	1.25			
-18	5/16	.025	1.00			

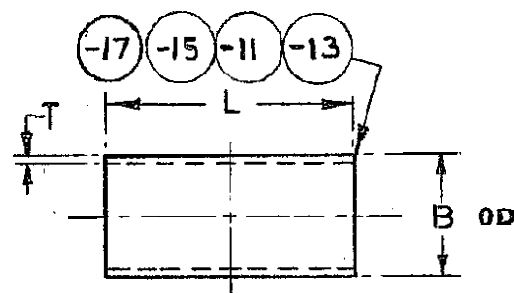

METAL SLEEVE

DASH NO.	DIMENSIONS			MATERIAL SPEC.	FINISH
-11	3/8	.028	.75	WW-T-700/4	A1
-13	1/2	.028	.75	5052 COND. 0	
-15	7/8	.035	1.00	WW-T-700/6	
-17	7/16	.035	.75	6061 COND. 0	

ASSY NO.	CONSISTING OF			
-2	-11	-12		
-3	-13	-14		
-4	-15	-16		
-5	-17	-18		

NOTE :

- PLASTIC SLEEVE TO BE FITTED INSIDE METAL SLEEVE.
- SLEEVE ASSEMBLY (METAL & PLASTIC SLEEVE) TO BE SLIPPED OVER CORD AND MAGNEFORMED.
- SLEEVE TO BE FLARED ON ASSEMBLY

DRAWN	M. GHAZAL	CLASSIFICATION		STANDARD
CHECKED	SCHRATNER	SLEEVE ASSY - MAGNEFORMED CORD		CSP 295
STRESSED				
APPROVED	AMS			

7 DEC 67

⑤ PLASTIC SLEEVE
-18 CANCELLED
-5 ASSY WAS -17-18
248. 5 MAY 81

⑤ THERMOF RNF 100
BLACK WAS COMMERCIAL
EQUIVALENT 18
25 FEB 81

⑤ 50-U COL
31 COL

⑤ T4 WAS T6
14.2.86 APR 86

⑤