


THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF BOMBARDIER INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF BOMBARDIER INC. THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AND USE, AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS.

de HAVILLAND

**CAGE CODE 71867
CVR STANDARD**

ONLY THE ITEM(S) LISTED ON THIS DRAWING AND IDENTIFIED BY VENDOR'S NAME(S), ADDRESS(ES) AND PART NUMBER(S) HAVE BEEN APPROVED FOR USE IN DE HAVILLAND AIRCRAFT. A SUBSTITUTE ITEM SHALL NOT BE USED WITHOUT PRIOR APPROVAL BY DE HAVILLAND ENGINEERING STANDARDS

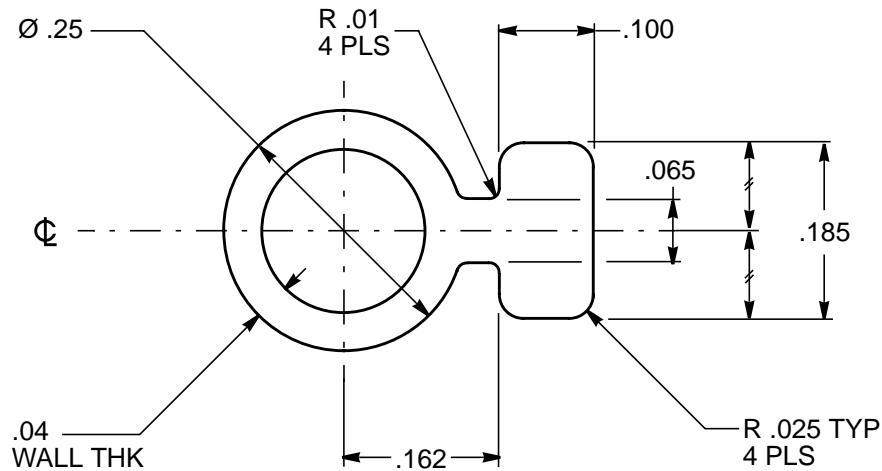

CVR 195-1

MATERIAL : SILICONE RUBBER PER AMS 3302
COLOR: NATURAL

NOTES :

1. MANUFACTURE TO MIN. LENGTH OF 96"
2. MATERIAL MUST MEET FLAMABILITY REQUIREMENTS OF FAR 25.853 (0.2)
3. DESIRED COMPRESSION PRESSURE QUARTER POUND \pm 15% PER INCH LENGTH AT 30% DEFLECTION
4. TOLERANCES UNLESS OTHERWISE SPECIFIED: .XXX \pm .010
.XX \pm .03
5. ALL DIMENSIONS ARE IN INCHES
6. REPLACES HUNTING PART H82520528-103
7. NOT TO SCALE

FOR ORIGINAL SIGNATURES, SEE THE ENGINEERING STANDARDS APPROVAL RECORD

DRAWN	E. DANESH
CHECKED	B. EDWARDS
STRESS	E. GIOVANNETTI
APPROVED	B. EDWARDS

**SEAL - DOOR
OVER HEAD BINS**

CVR 195

SHEET: 1 OF 1

REV:

REV:

REV:

REV:

REV:

APPROVED: 12 FEBRUARY 2009