

This drawing is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without the permission of THE DE HAVILLAND AIRCRAFT OF CANADA LIMITED


REPORT ALL DRAWING ERRORS TO ENGINEERING

REVISIONS

CHANGE	ITEM NO.	DESCRIPTION	DATE	DRAWN	CHECKED	STRESS	APPROVED
A		ROLLER DIA .500 WAS .375. DIM. 1.781 WAS 1.728. OVERTRAVEL DIM. .250 WAS .197	20. 2. 76	J. G.			
B		LOCKWASHER WAS MS35338-145	14. 2. 76	MB			
C		NOTE 5 ADDED	25. 8. 82	MB			

VENDOR PART NO	VENDOR	CODE IDENT
424HE23-RB	MICROSWITCH-FREEMONT-ILLINOIS	91929

APPROVED
VENDORS.

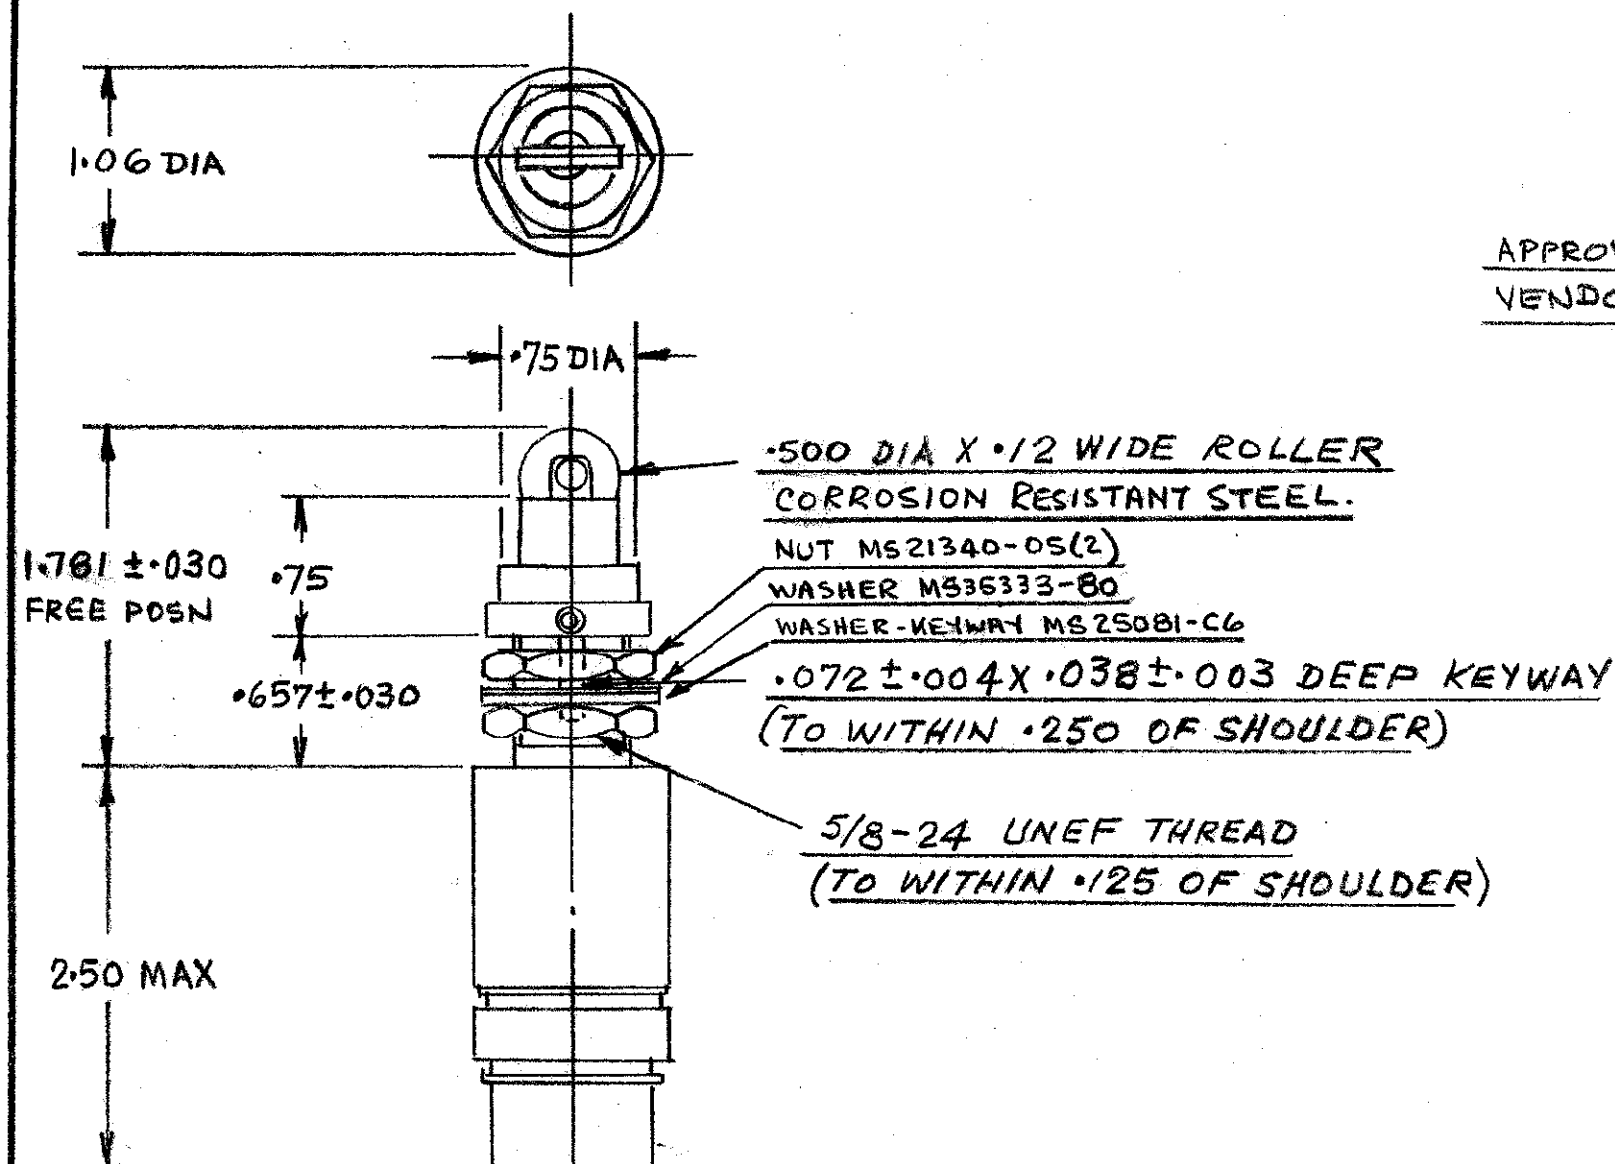


RECEPTACLE TO MATE
WITH MS3126E14-158
(MS3113H14-15P REF)

SEE NOTE 5

CHARACTERISTICS.

OPERATING FORCE 6-12 LB
FULL TRAVEL " 30 LB. MAX
RELEASE " 4 LB. MIN
PRETRAVEL .040 MAX
DIFF. TRAVEL .020 MAX
OVERTRAVEL .250 MIN.

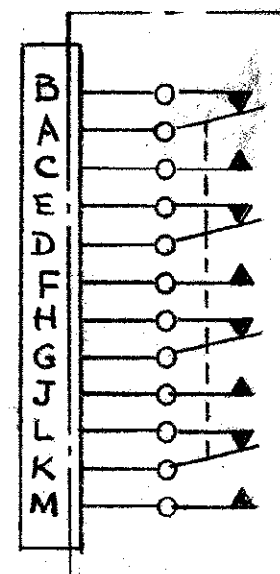

WIRING DIA
(DEENERGIZED)

NOTES.

1. ENCLOSURE FINISHED WITH GREEN EPOXY BASED ENAMEL COLOR NO 34151 PER FED. SPEC. 595.
2. UNIT TO MEET IMMERSION TEST REQUIREMENTS OF MIL-E-5272 PROC. 1.
3. CONTACT RATING. 28VDC, 5AMP. RES., 3AMP. IND., 4AMP MOTOR LOAD; SEA LEVEL TO 100,000 FT.
4. HERMETIC SEALING REQUIRED PER MIL-B-8805, HERMETIC, DESIGN S.
5. RECEPTACLE MUST INCLUDE ENGAGEMENT SEAL IN ACCORDANCE WITH MIL-C-26482G

SOURCE CONTROL DRAWING

ONLY THE ITEM(S) LISTED ON THIS DRAWING AND IDENTIFIED BY VENDOR'S NAME(S), ADDRESS(ES) AND PART NUMBER(S) HAVE BEEN APPROVED BY THE DE HAVILLAND AIRCRAFT OF CANADA LIMITED FOR THE USE IN DHC AIRCRAFT. A SUBSTITUTE ITEM SHALL NOT BE USED WITHOUT PRIOR APPROVAL BY THE DE HAVILLAND AIRCRAFT OF CANADA LTD.

DRAWN	M. DOLAN
CHECKED	J. G.
STD. M&P	10.1.74
STRESS	
CH. DRAFT	
DATE	Jan 16/74

THE DE HAVILLAND AIRCRAFT OF CANADA LIMITED
DOWNSVIEW ONTARIO

DRAWING TITLE

SWITCH-LIMIT-4PDT
NOSEGEAR DOWNLOCK

CODE IDENT NO.	DWG SIZE	DRAWING NO.	RELEASE	REV.
71867	B	DSC169		C
SCALE	WGT. CALC	ACTUAL	SHEET	